


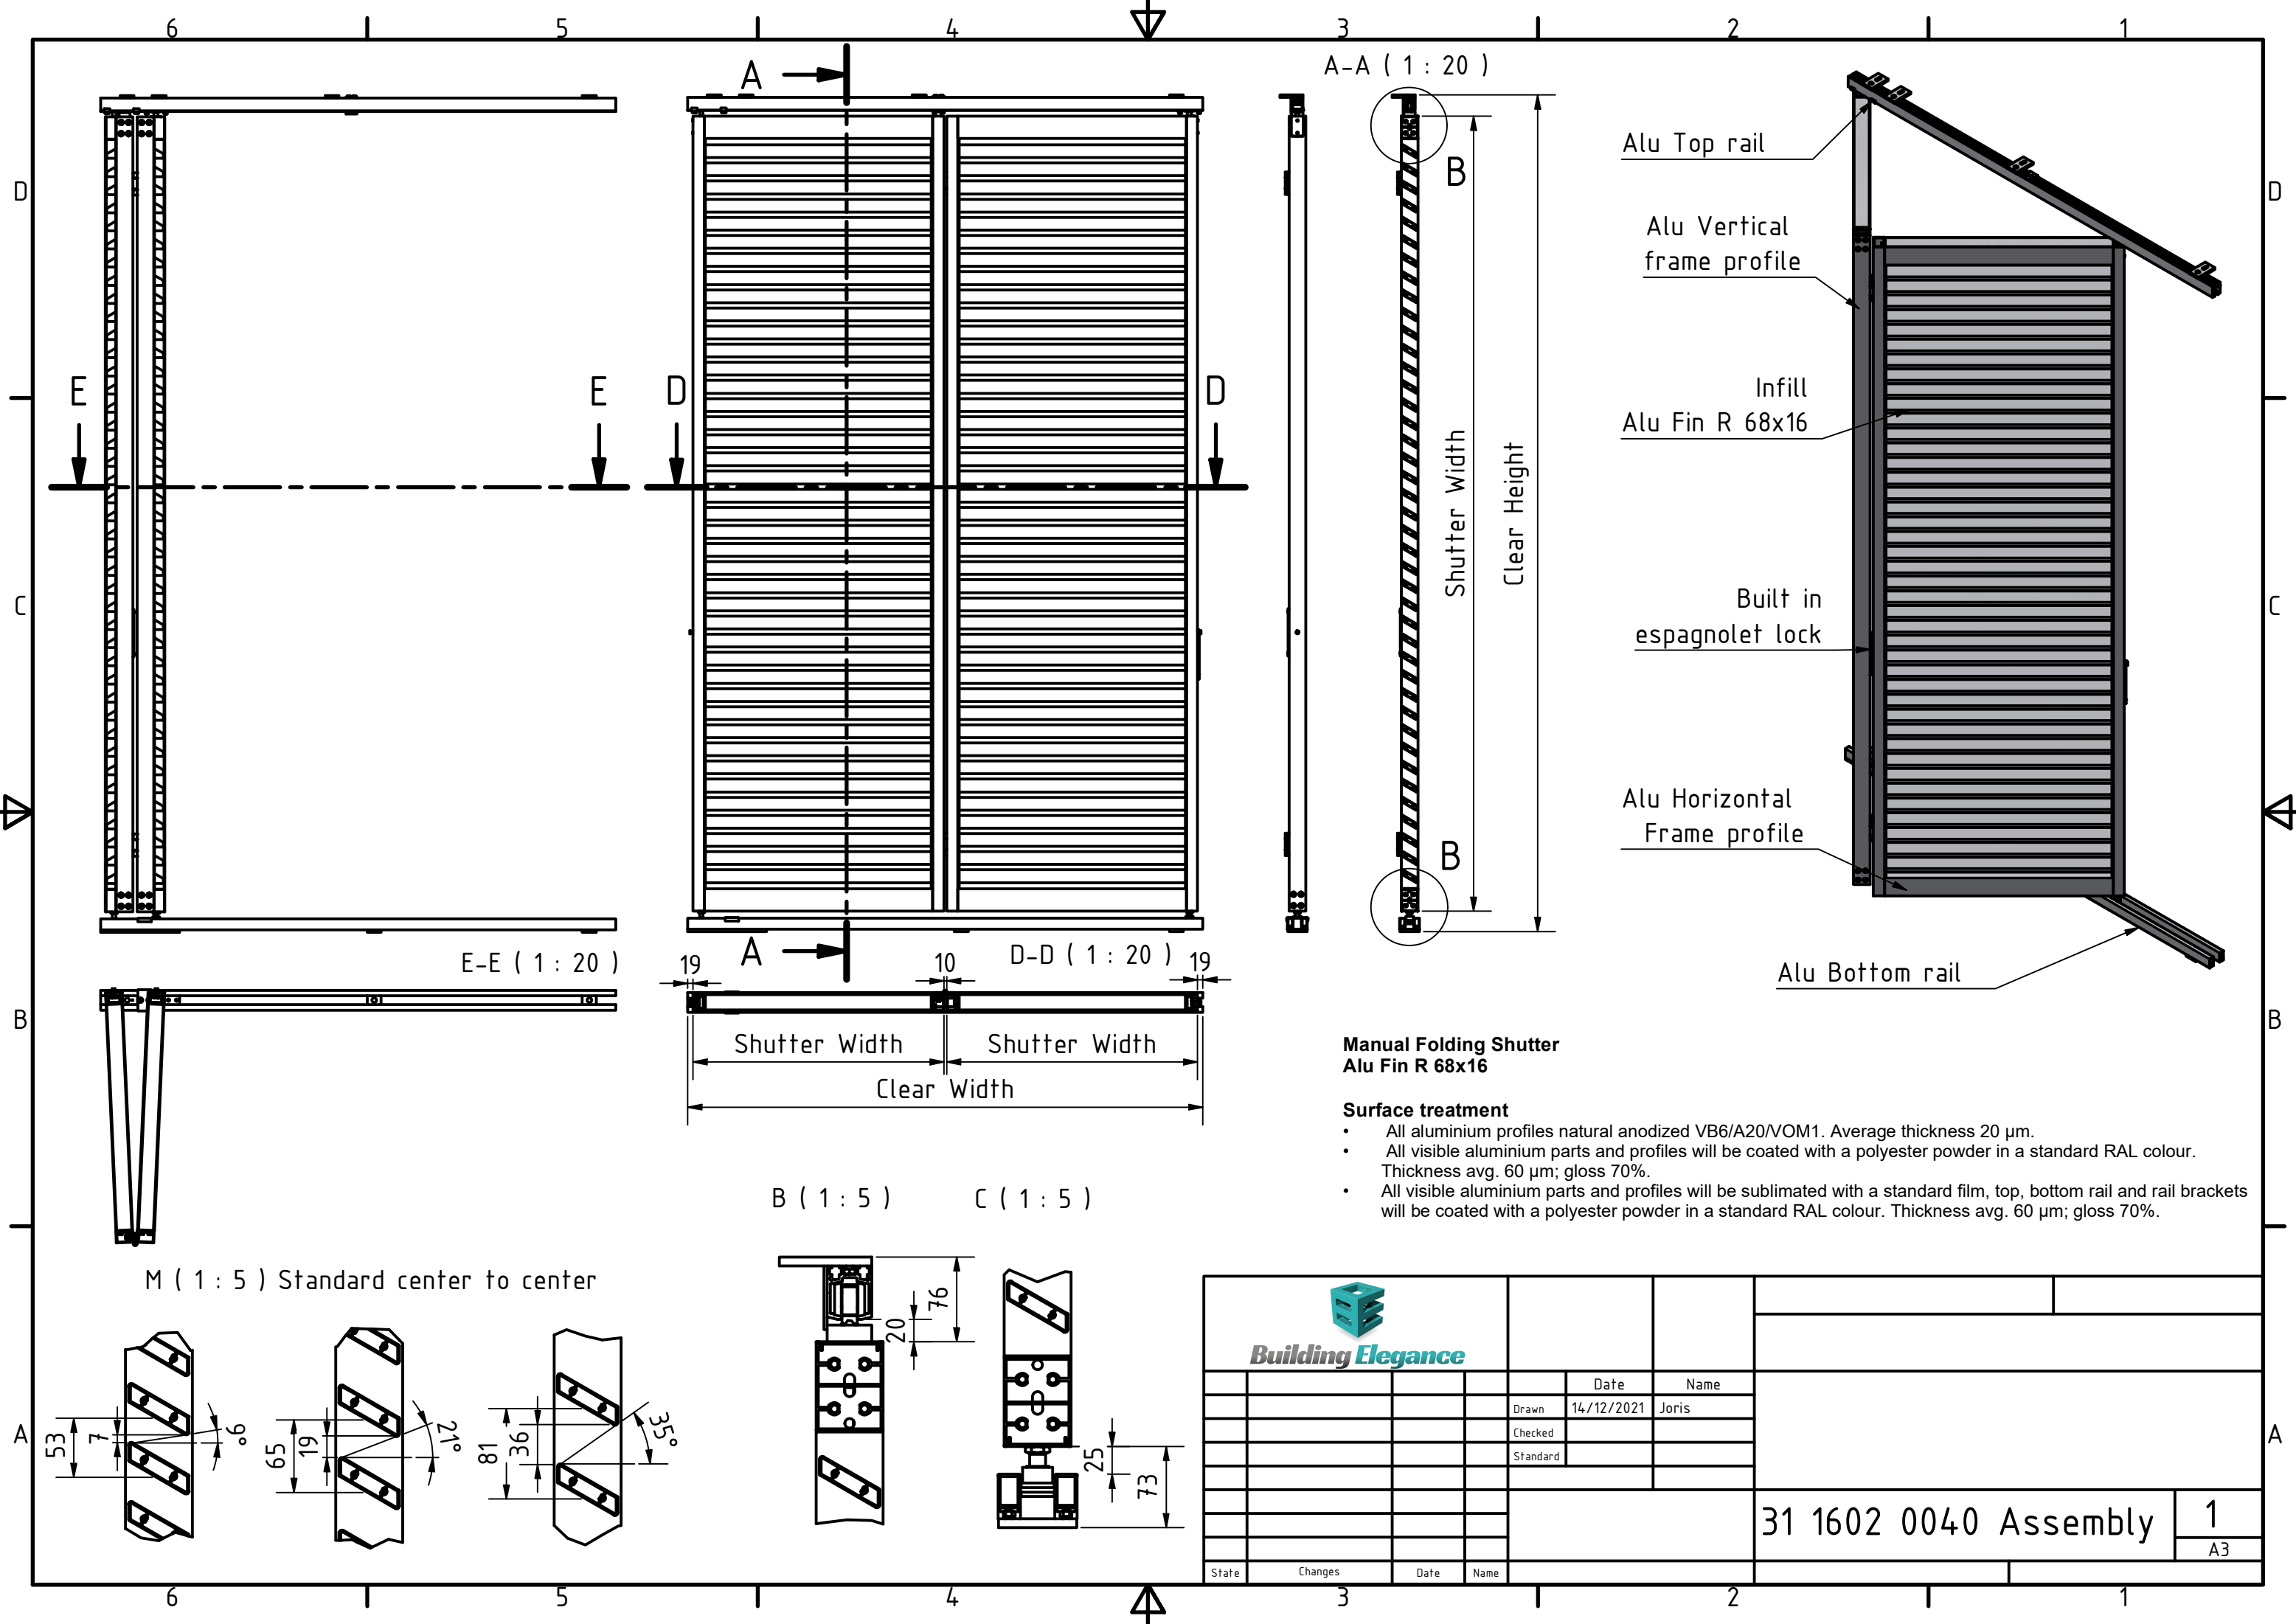

Manual Folding Shutter
Alu Fin R 68x16

Surface treatment

- All aluminium profiles natural anodized VB6/A20/VOM1. Average thickness 20 µm.
- All visible aluminium parts and profiles will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.
- All visible aluminium parts and profiles will be sublimated with a standard film, top, bottom rail and rail brackets will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.

 Building Elegance											
					Date	Name					
				Drawn	14/12/2021	Joris					
				Checked							
				Standard							
							31 1602 0040 Assembly				
State	Changes	Date	Name								
							1				
							A3				