


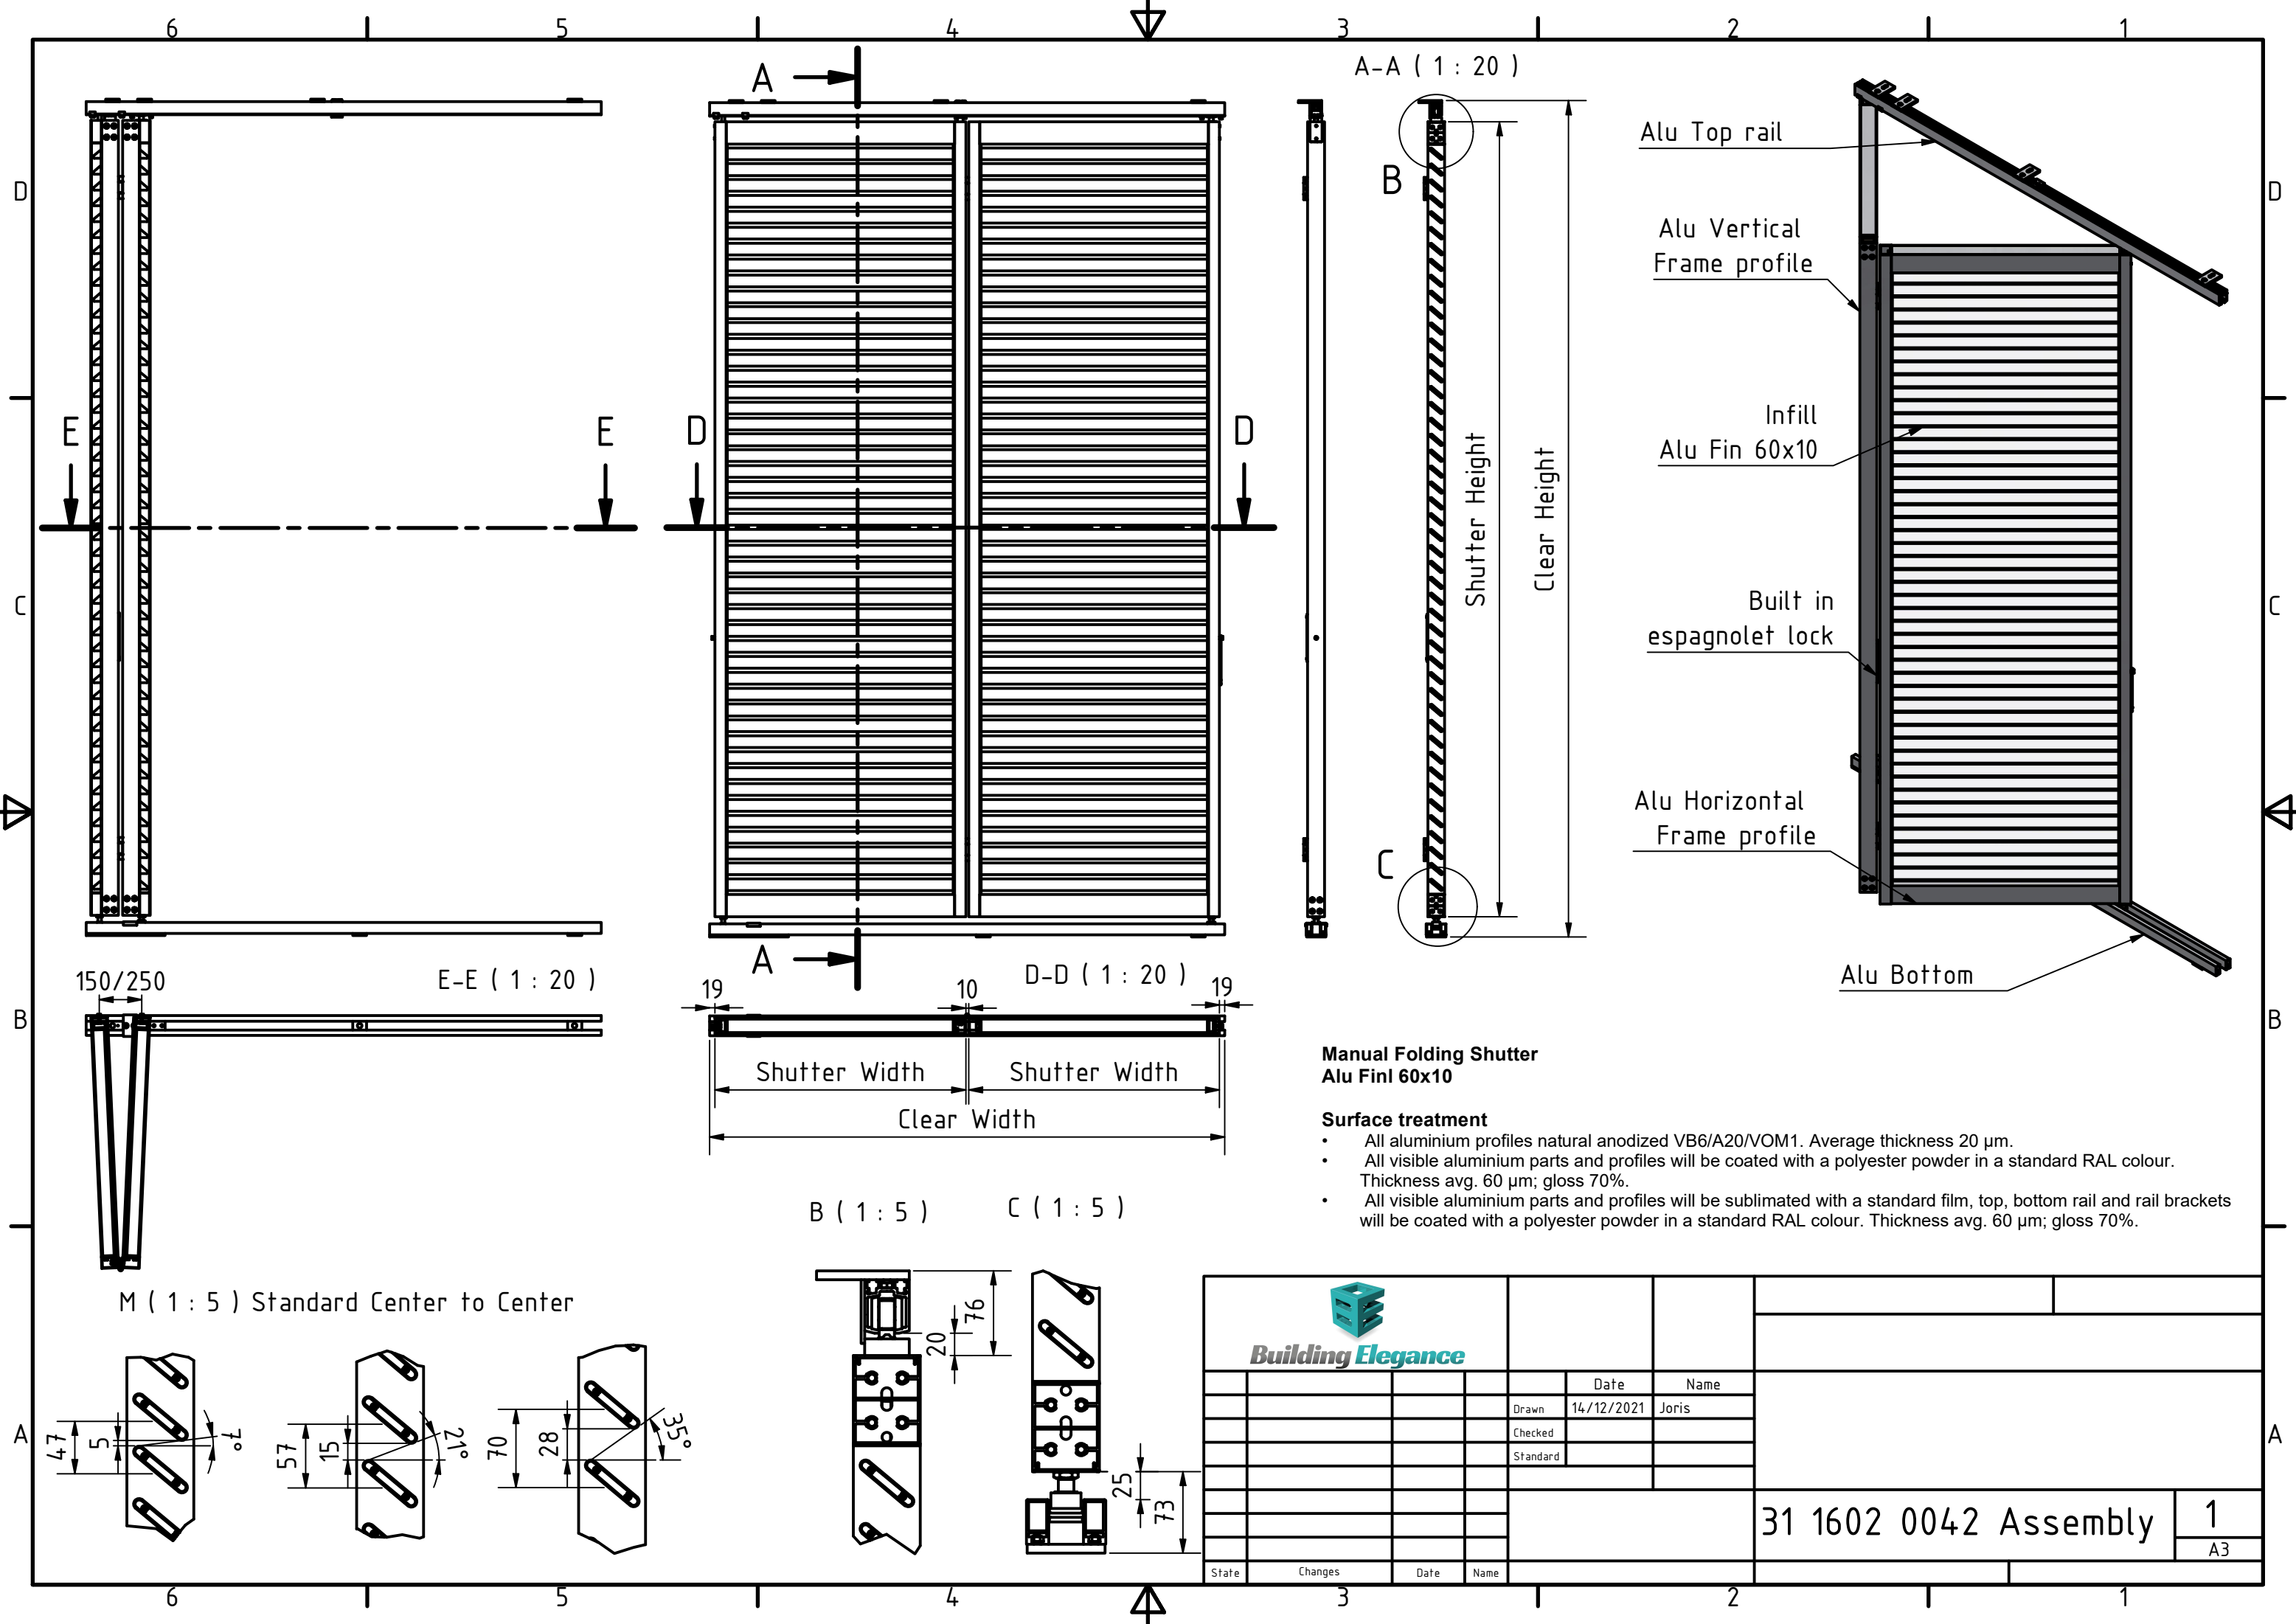

Manual Folding Shutter
Alu Finl 60x10

Surface treatment

- All aluminium profiles natural anodized VB6/A20/VOM1. Average thickness 20 µm.
- All visible aluminium parts and profiles will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.
- All visible aluminium parts and profiles will be sublimated with a standard film, top, bottom rail and rail brackets will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.

 Building Elegance													
					Date	Name							
				Drawn	14/12/2021	Joris							
				Checked									
				Standard									
								31 1602 0042 Assembly			1		
											A3		
State	Changes	Date	Name										