


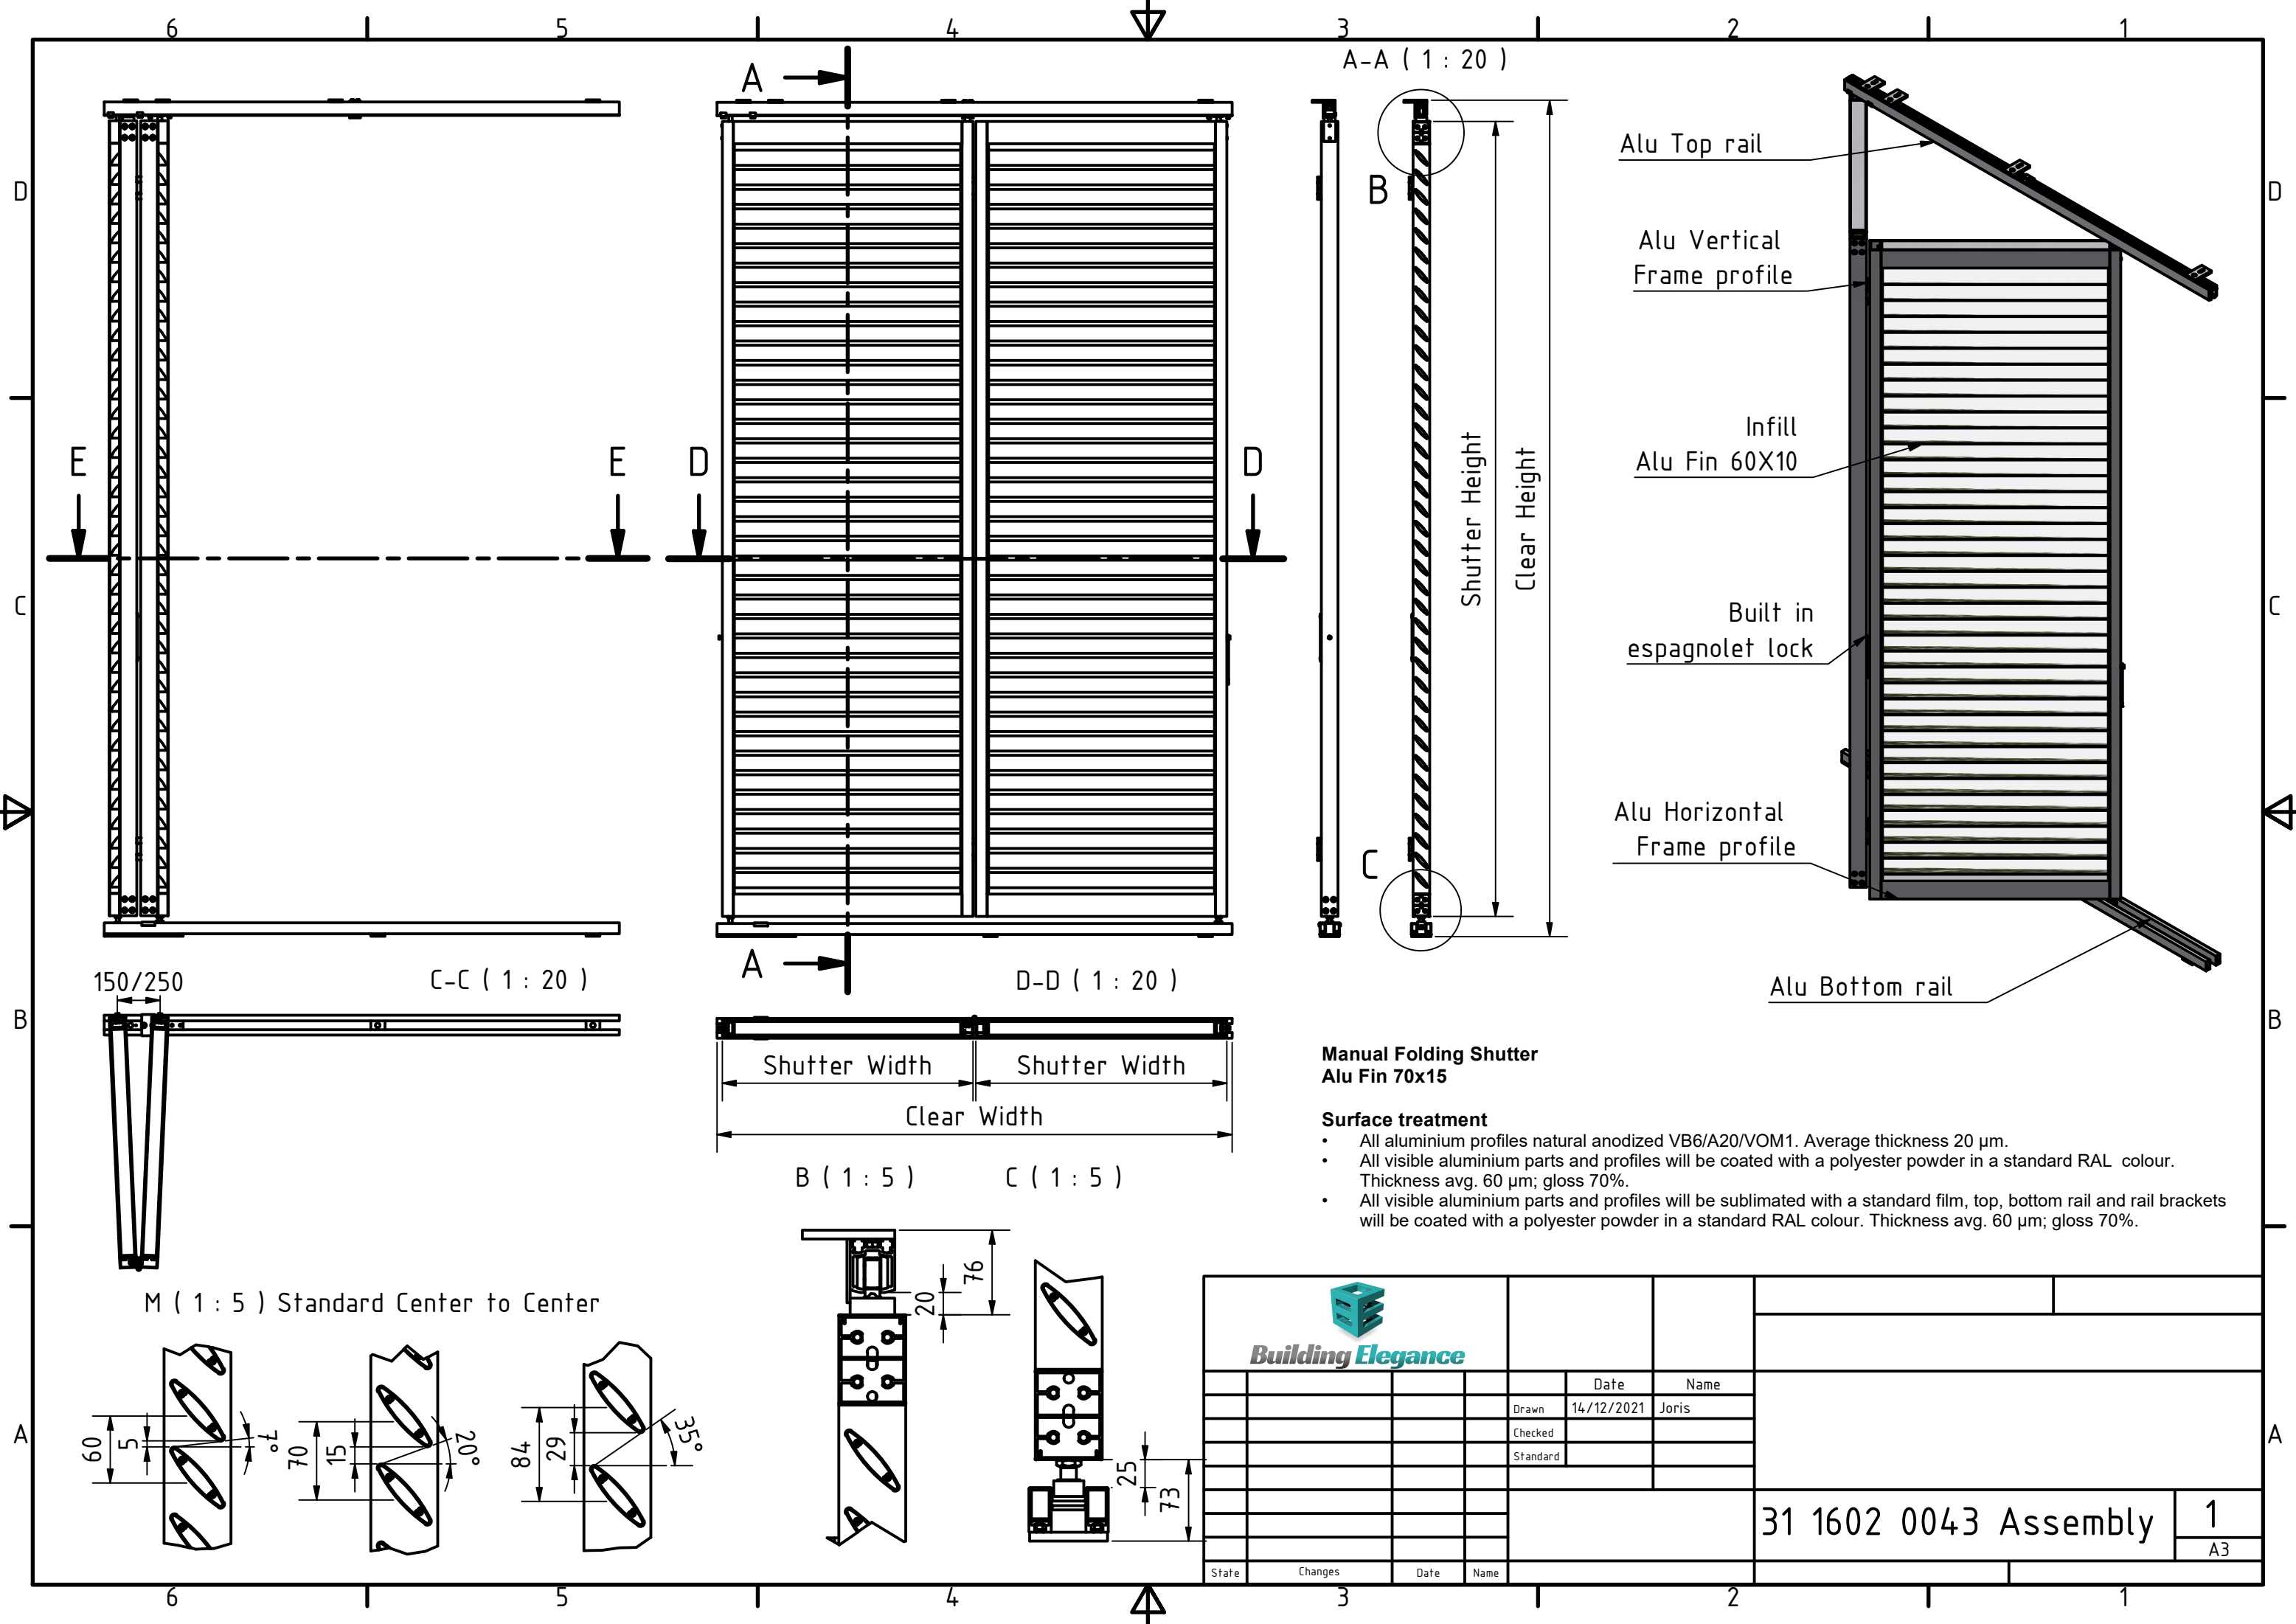

Manual Folding Shutter
Alu Fin 70x15

Surface treatment

- All aluminium profiles natural anodized VB6/A20/VOM1. Average thickness 20 µm.
- All visible aluminium parts and profiles will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.
- All visible aluminium parts and profiles will be sublimated with a standard film, top, bottom rail and rail brackets will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.

 Building Elegance		Date		Name	
		Drawn	14/12/2021	Joris	
		Checked			
		Standard			
31 1602 0043 Assembly					1
					A3