


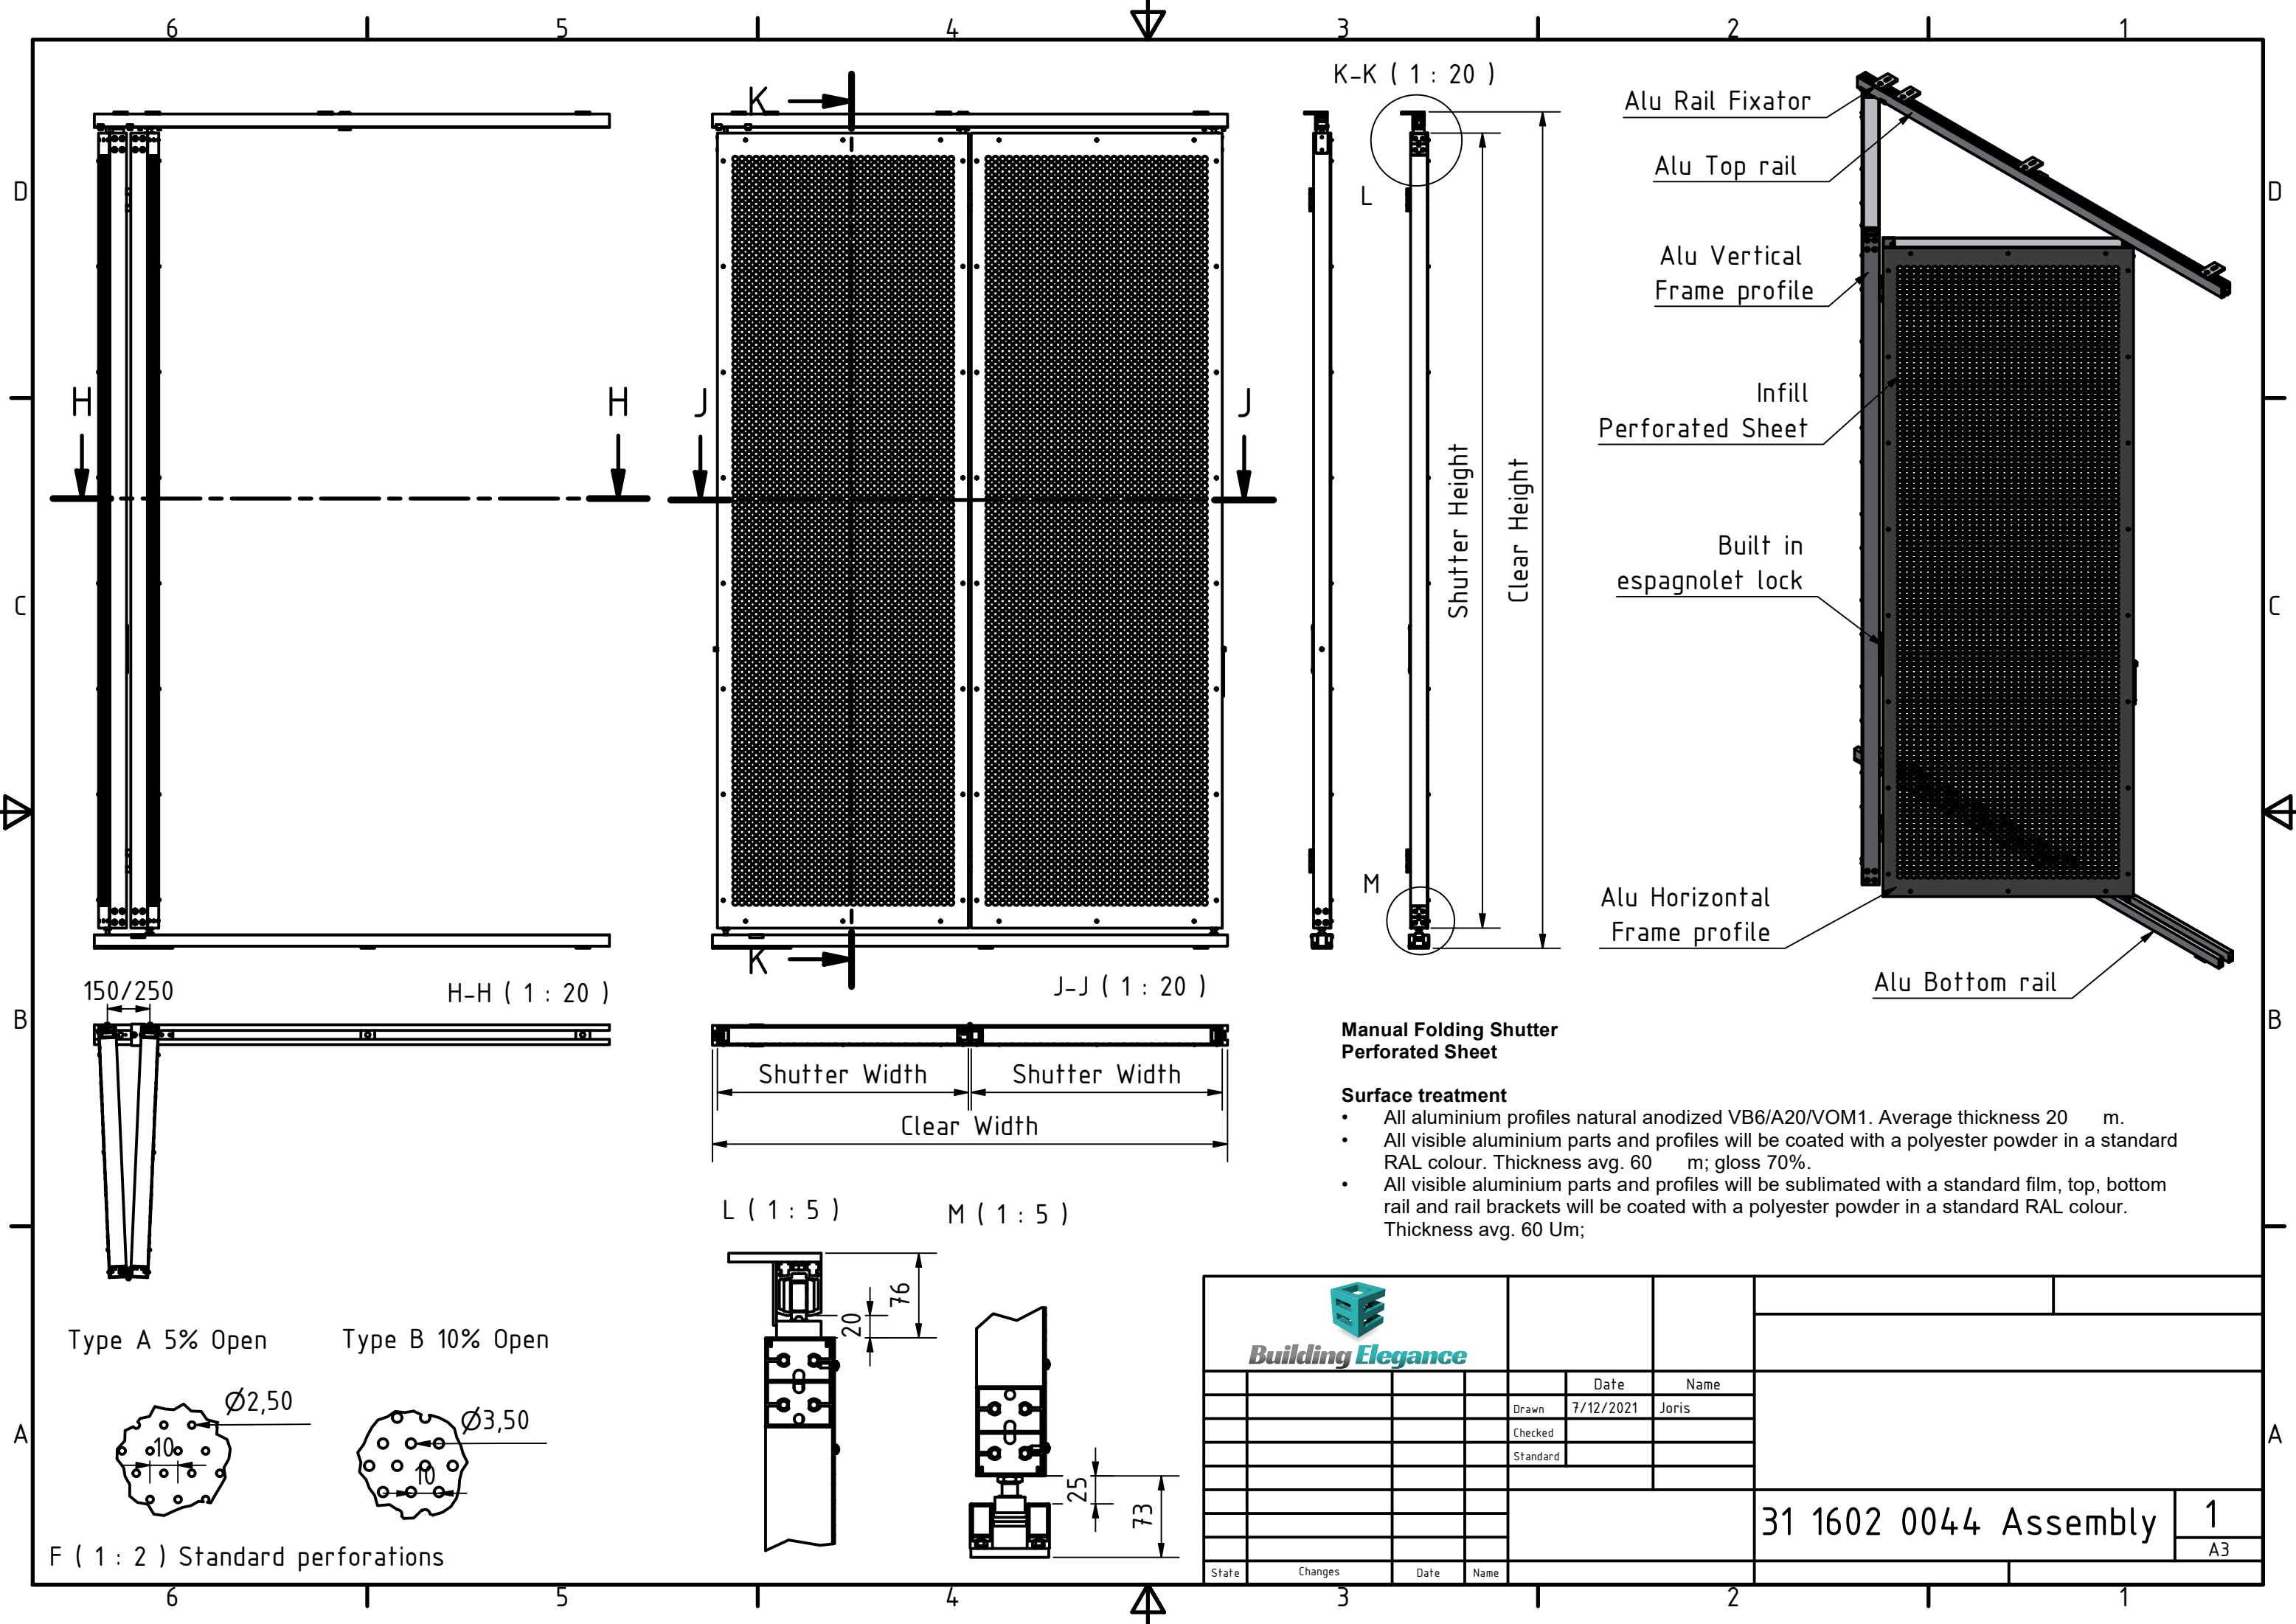

**Manual Folding Shutter
Perforated Sheet**

Surface treatment

- All aluminium profiles natural anodized VB6/A20/VOM1. Average thickness 20 m.
- All visible aluminium parts and profiles will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 m; gloss 70%.
- All visible aluminium parts and profiles will be sublimated with a standard film, top, bottom rail and rail brackets will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 Um;

 Building Elegance										
				Date	Name					
				Drawn	7/12/2021					Joris
				Checked						
				Standard						
						31 1602 0044 Assembly		1		
								A3		
State	Changes	Date	Name							