



6 1 5 1 4 3 1 2 1 1

A-A (1 : 20)


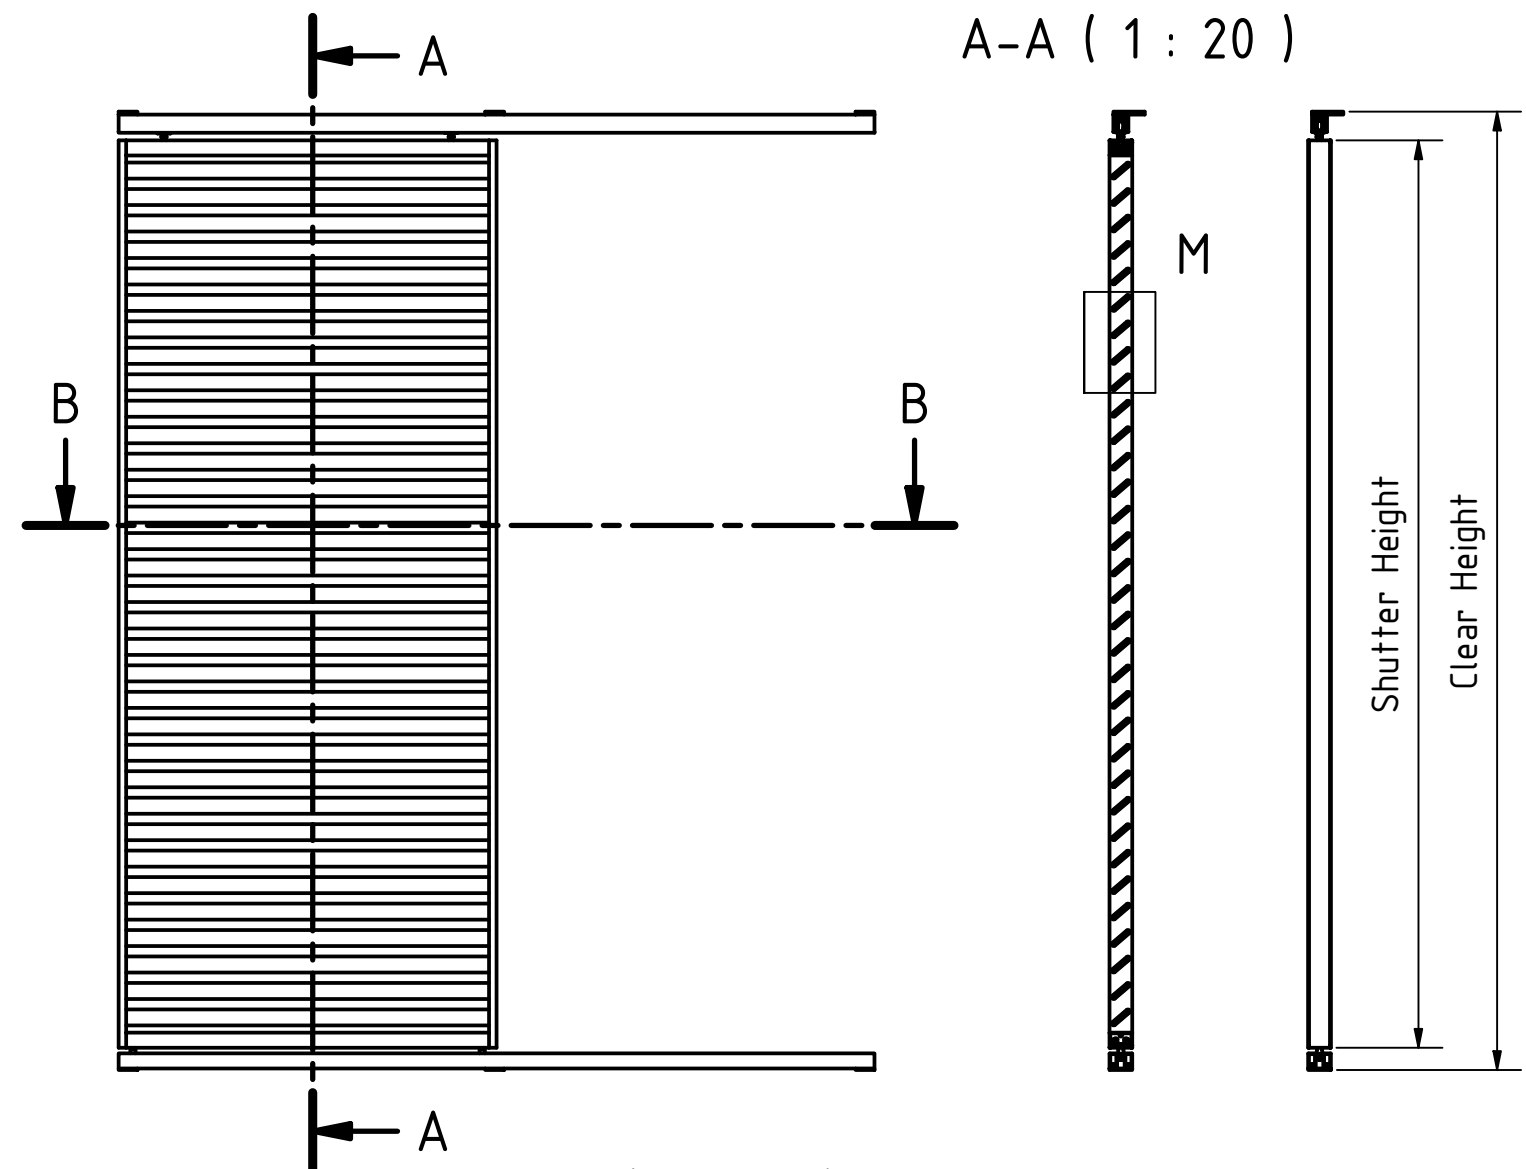


B-B (1 : 20)

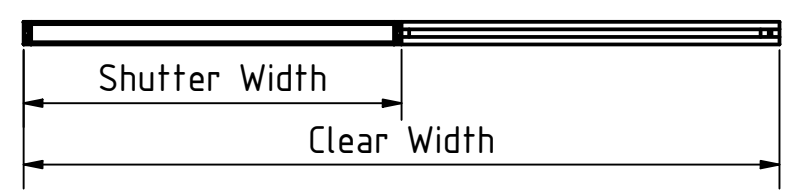

M (1 : 5) Standard center to center

Fin Type

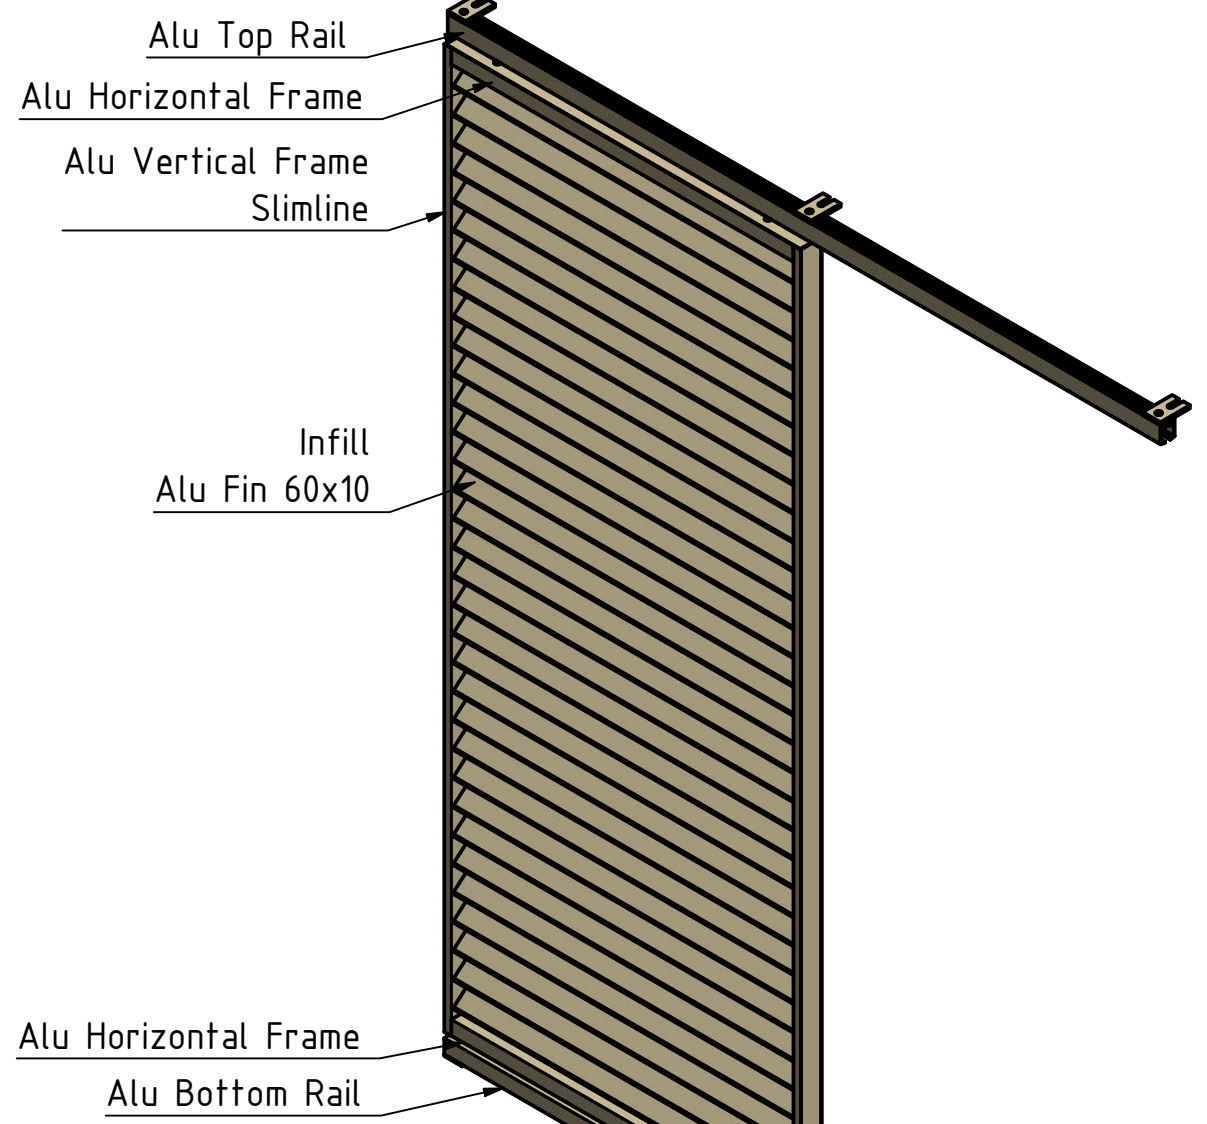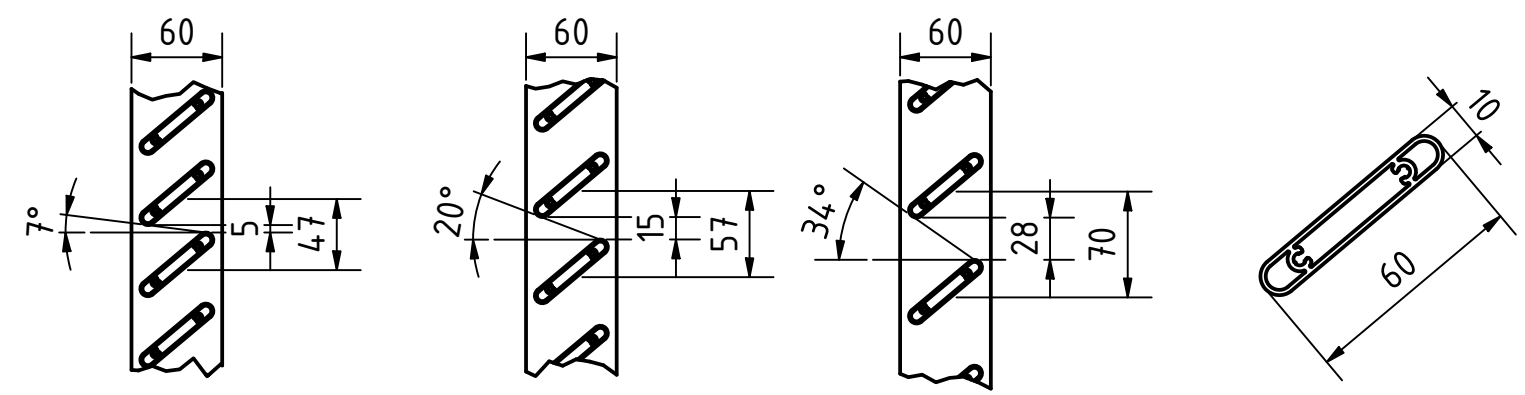

Manual Sliding Shutter
Slimline Alu Fin 60x10

Surface treatment

- All aluminium profiles natural anodized VB6/A20/VOM1. Average thickness 20 µm.
- All visible aluminium parts and profiles will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.
- All visible aluminium parts and profiles will be sublimated with a standard film, top, bottom rail and rail brackets will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.

		Date	Name	SS 60x20 Alu Fin 60x10
		Drawn 2-4-2020	JVdD	
		Checked		31 1601 0052 Assembly
		Standard		
				1
				A3
State	Changes	Date	Name	

6 1 5 1 4 3 1 2 1 1