

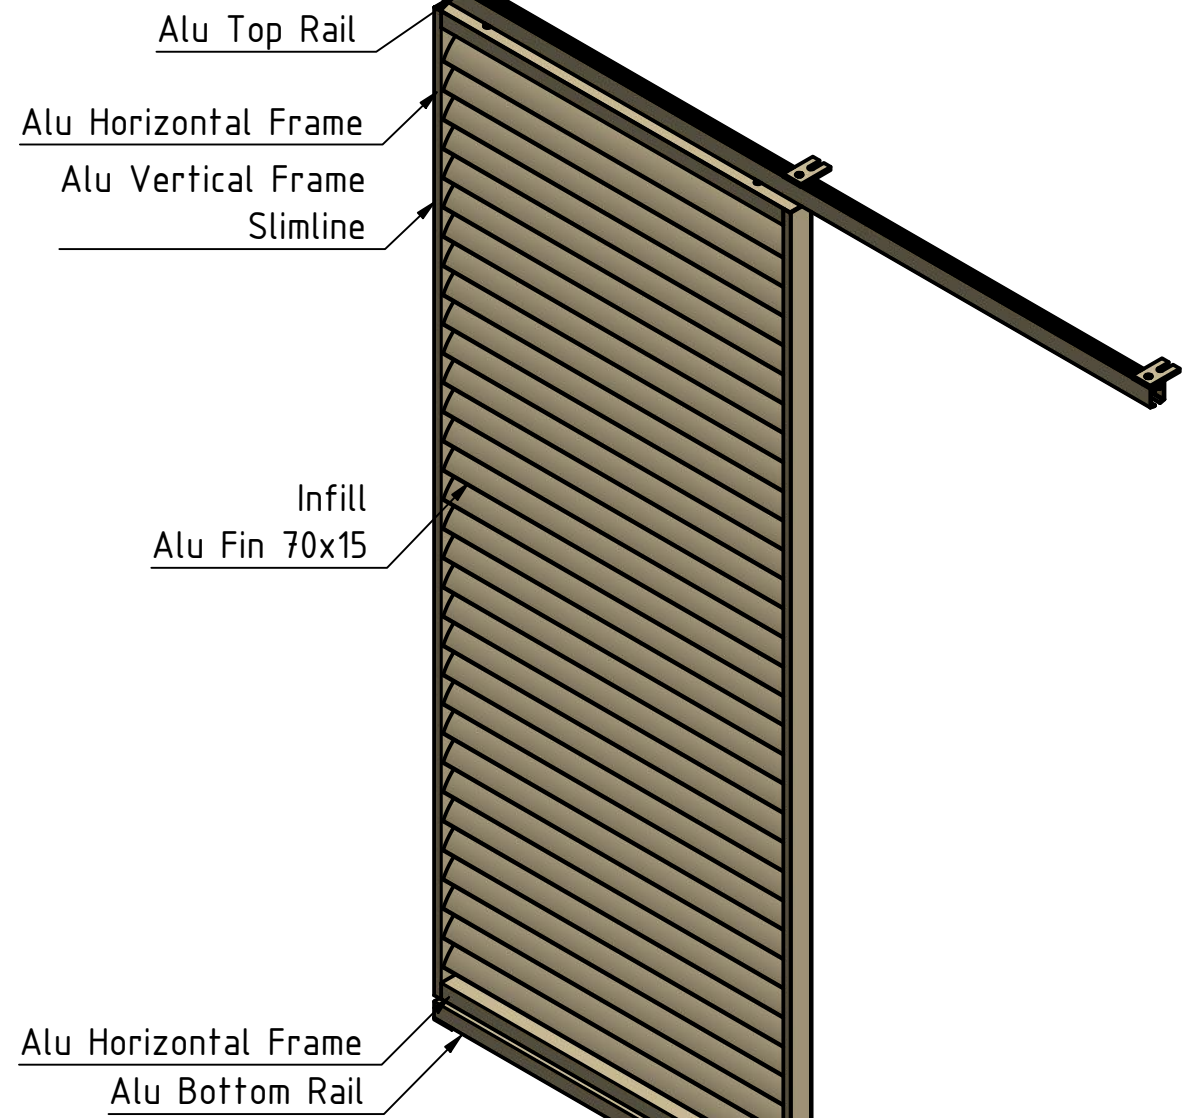


A-A (1 : 20)

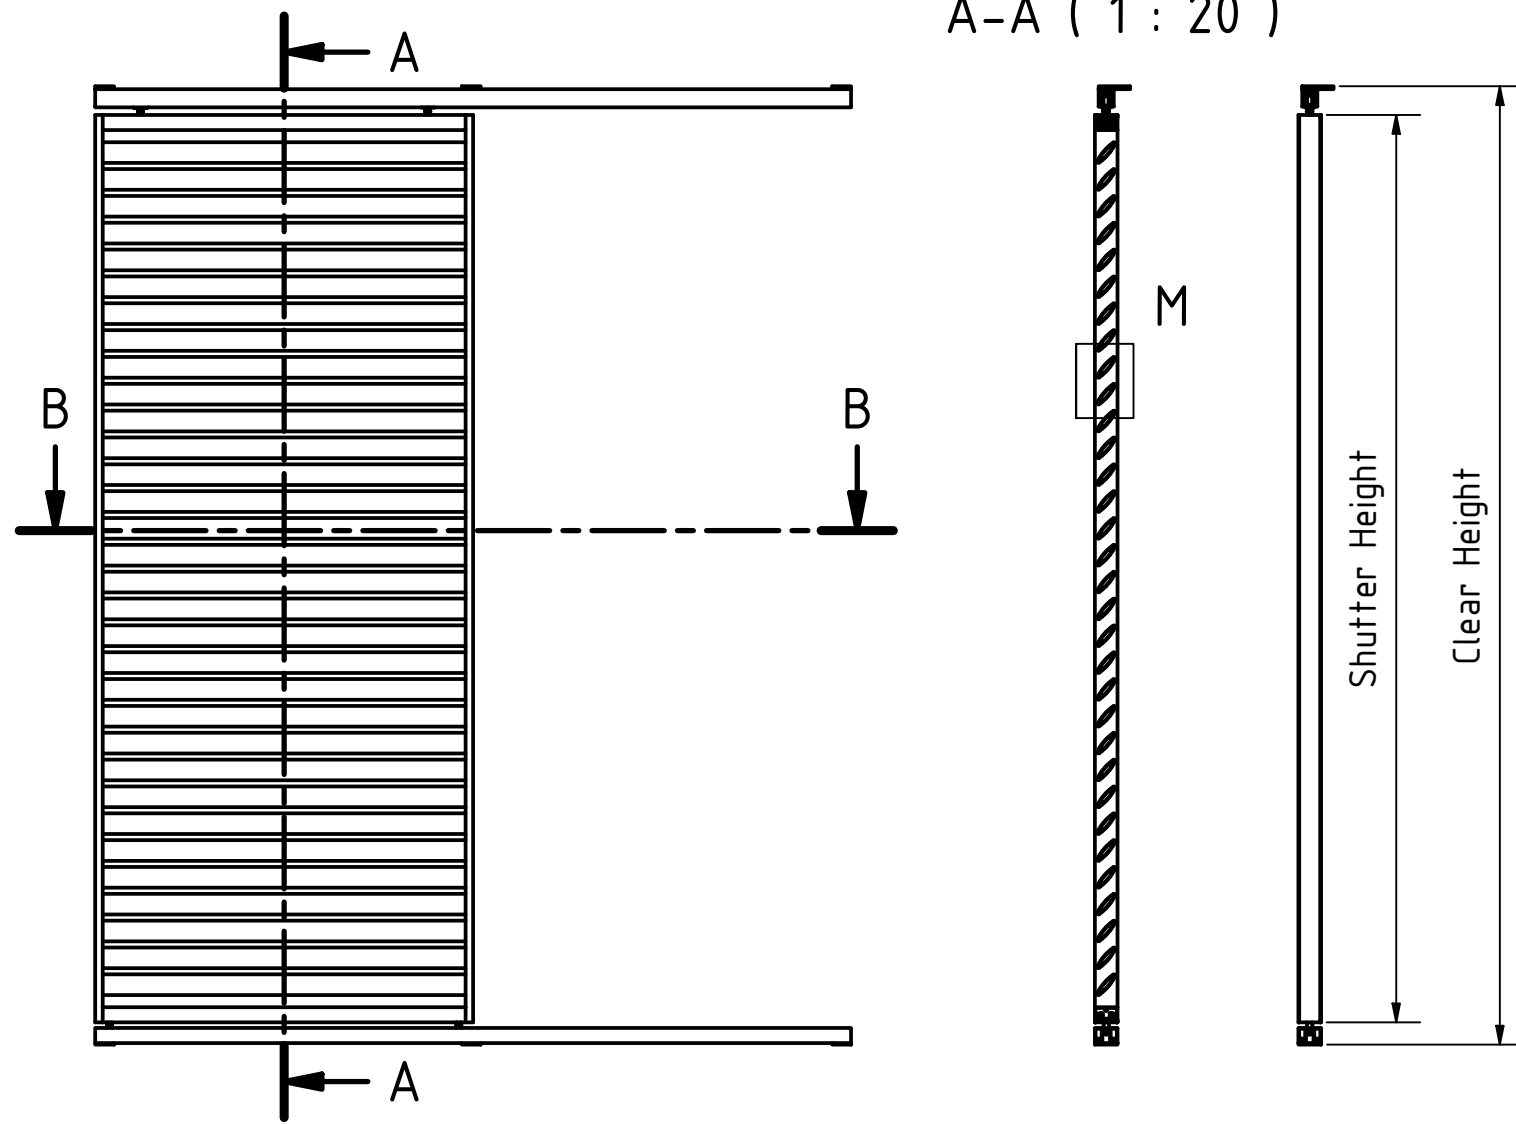

B-B (1 : 20)

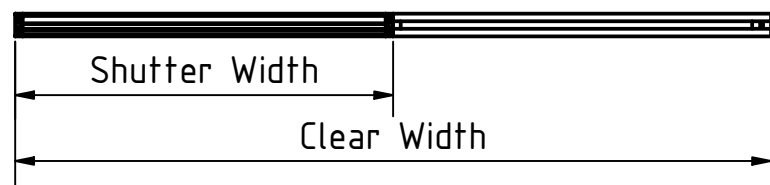


Manual Sliding Shutter
Slimline Alu Fin 70x15

Surface treatment

- All aluminium profiles natural anodized VB6/A20/VOM1. Average thickness 20 µm.
- All visible aluminium parts and profiles will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.
- All visible aluminium parts and profiles will be sublimated with a standard film, top, bottom rail and rail brackets will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.

M (1 : 5) Standard Center to Center

Fin Type

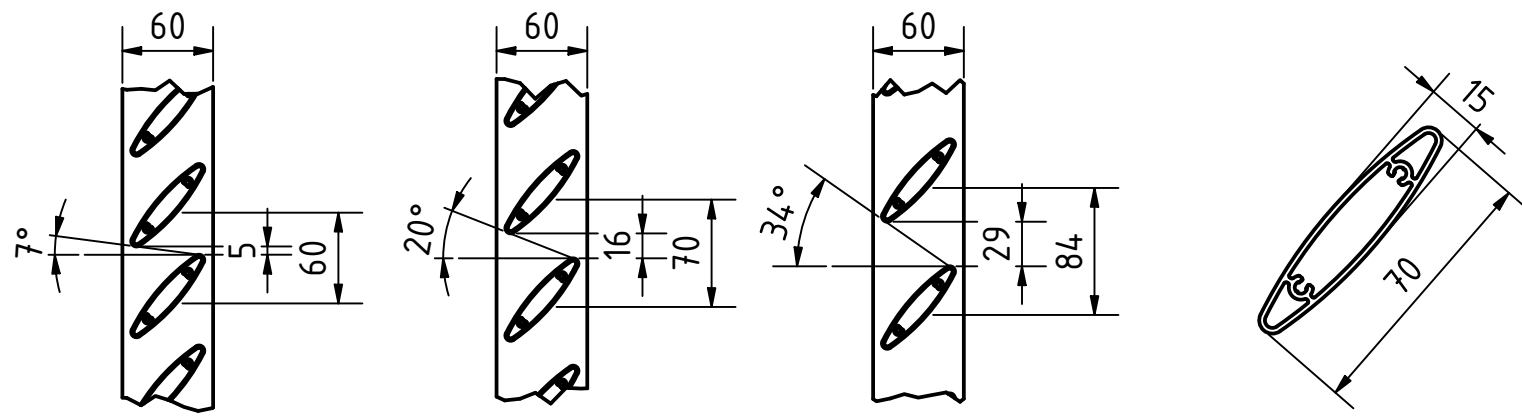

		Date	Name	SS 60x20 Alu Fin 70x15	
		Drawn	2-4-2020		JVdD
Checked					
Standard					
				31 1601 0055 Assembly	1
					A3
State	Changes	Date	Name		