


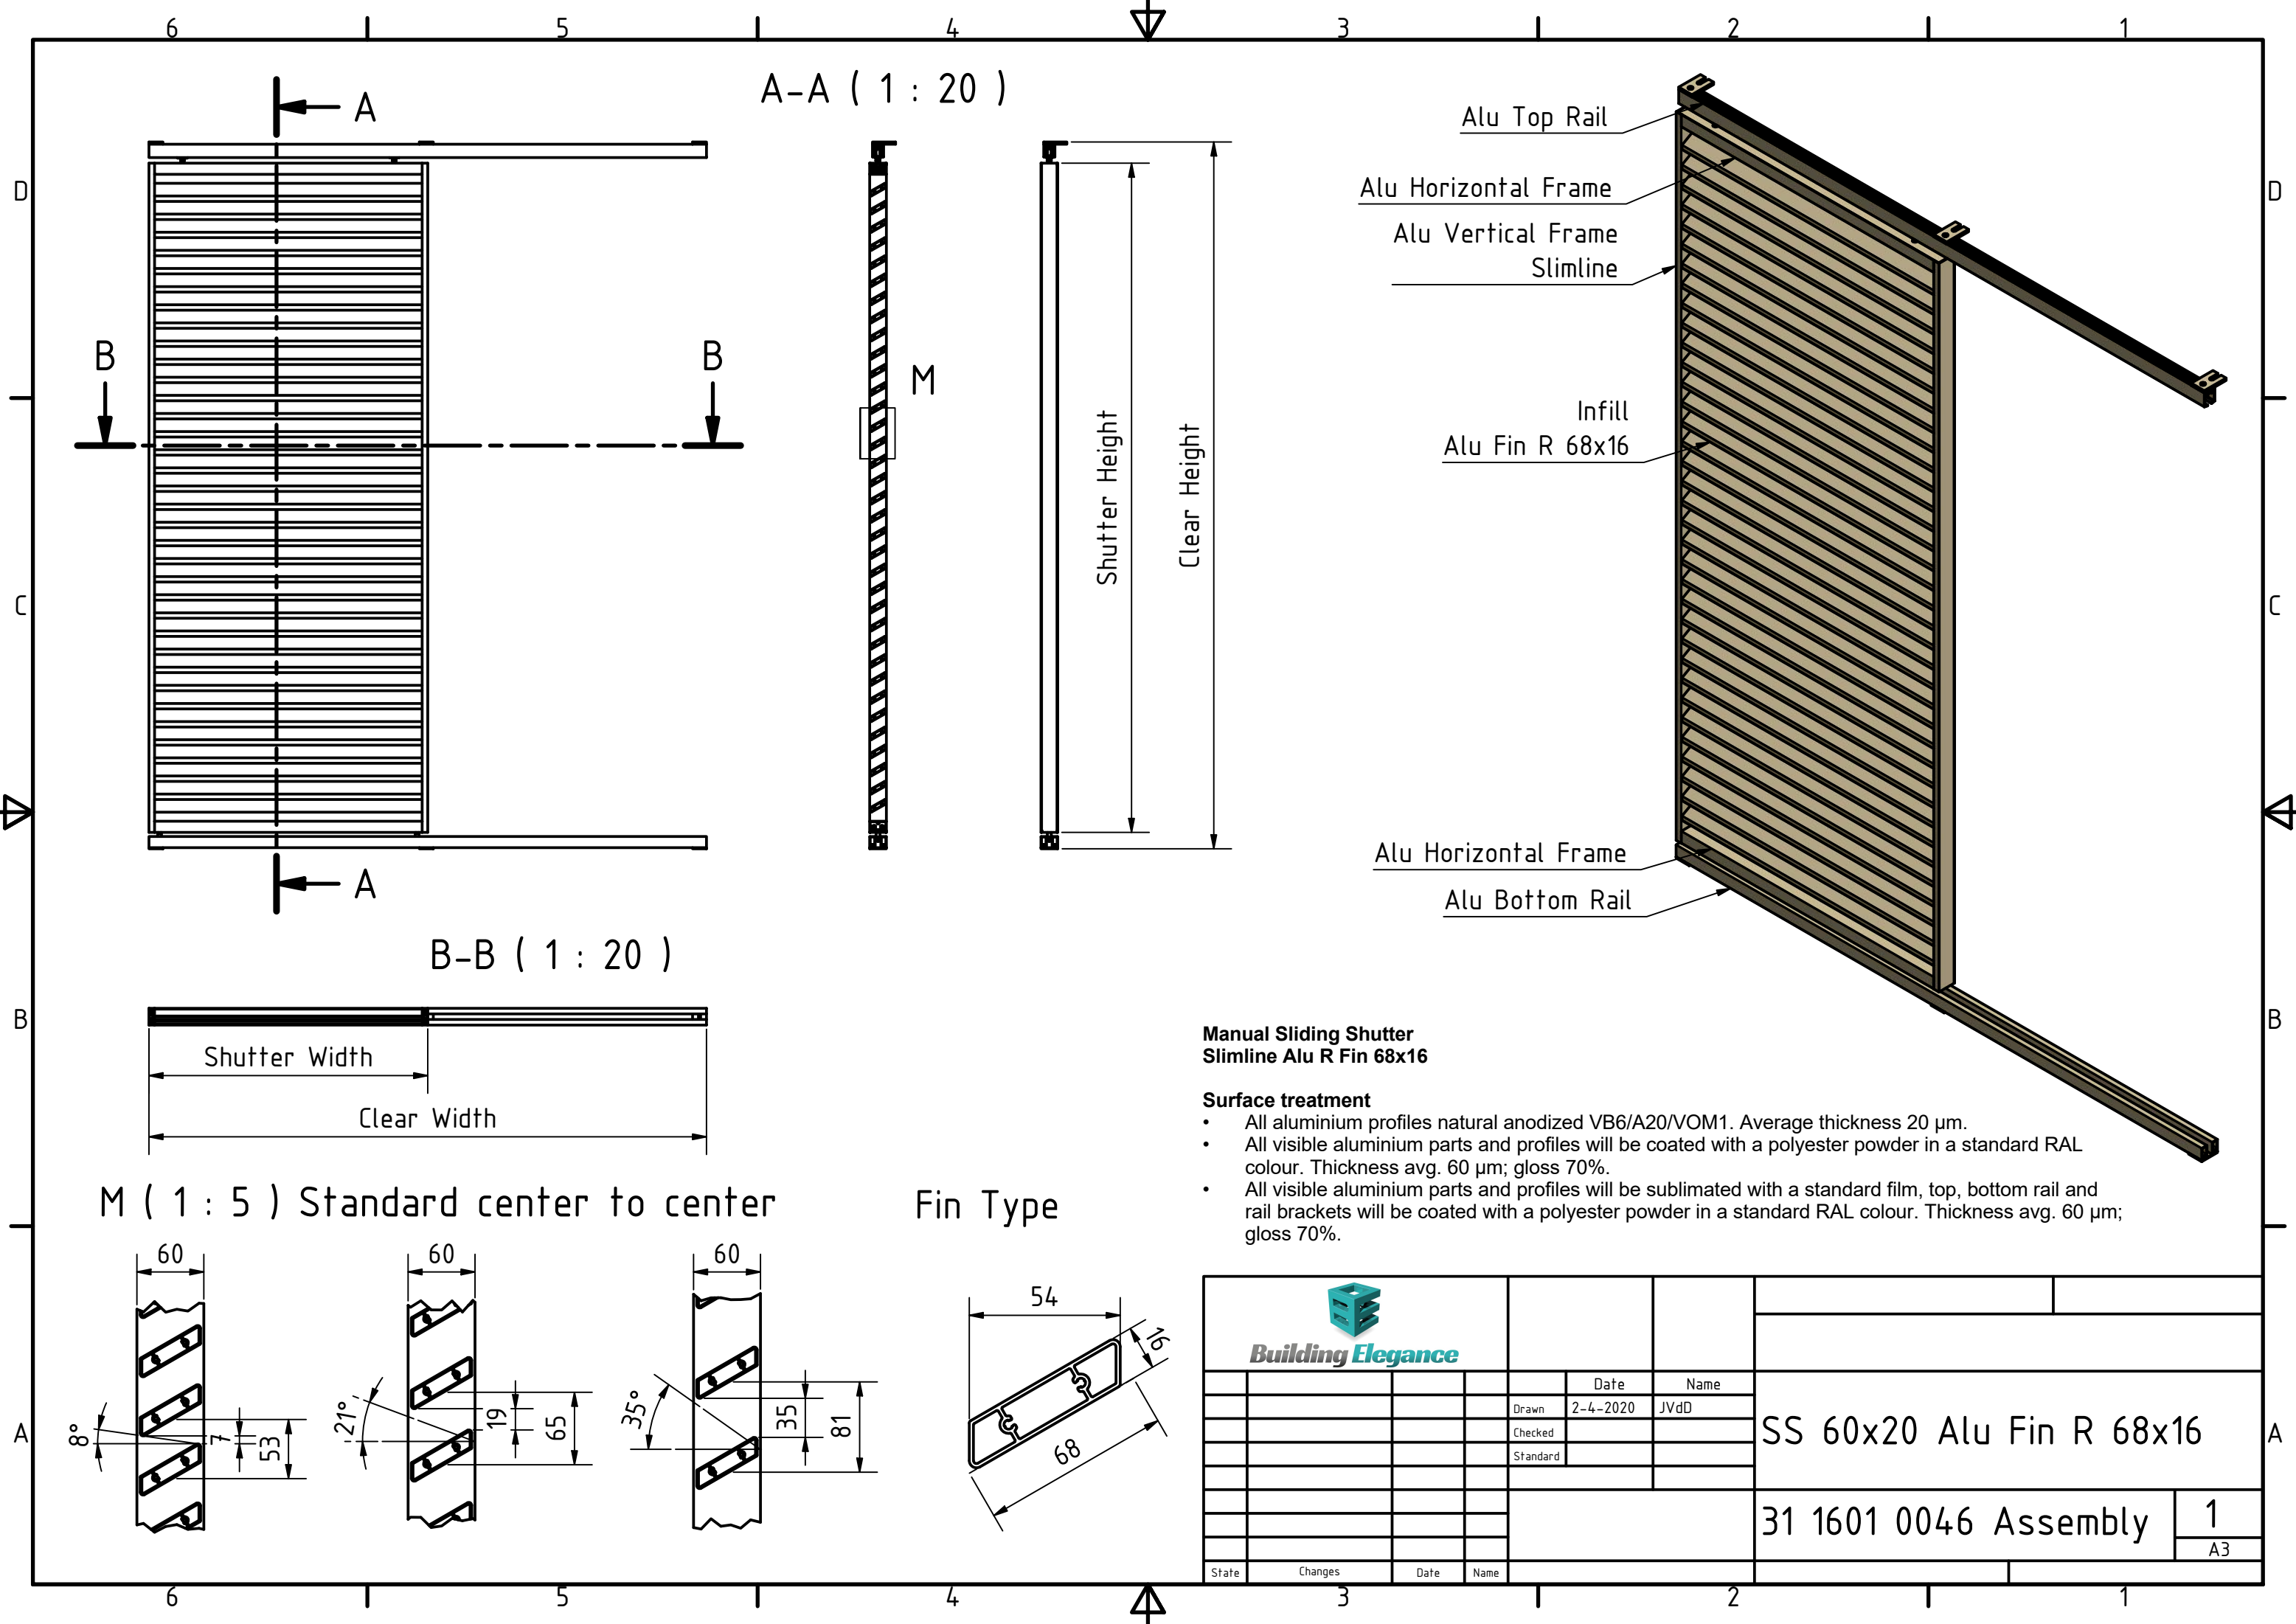

Manual Sliding Shutter
Slimline Alu R Fin 68x16

Surface treatment

- All aluminium profiles natural anodized VB6/A20/VOM1. Average thickness 20 µm.
- All visible aluminium parts and profiles will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.
- All visible aluminium parts and profiles will be sublimated with a standard film, top, bottom rail and rail brackets will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.

 Building Elegance							
		Date		Name			
		Drawn	2-4-2020	JVdD		SS 60x20 Alu Fin R 68x16	
		Checked					
		Standard					
						31 1601 0046 Assembly	
						1	
						A3	
State	Changes	Date	Name				