


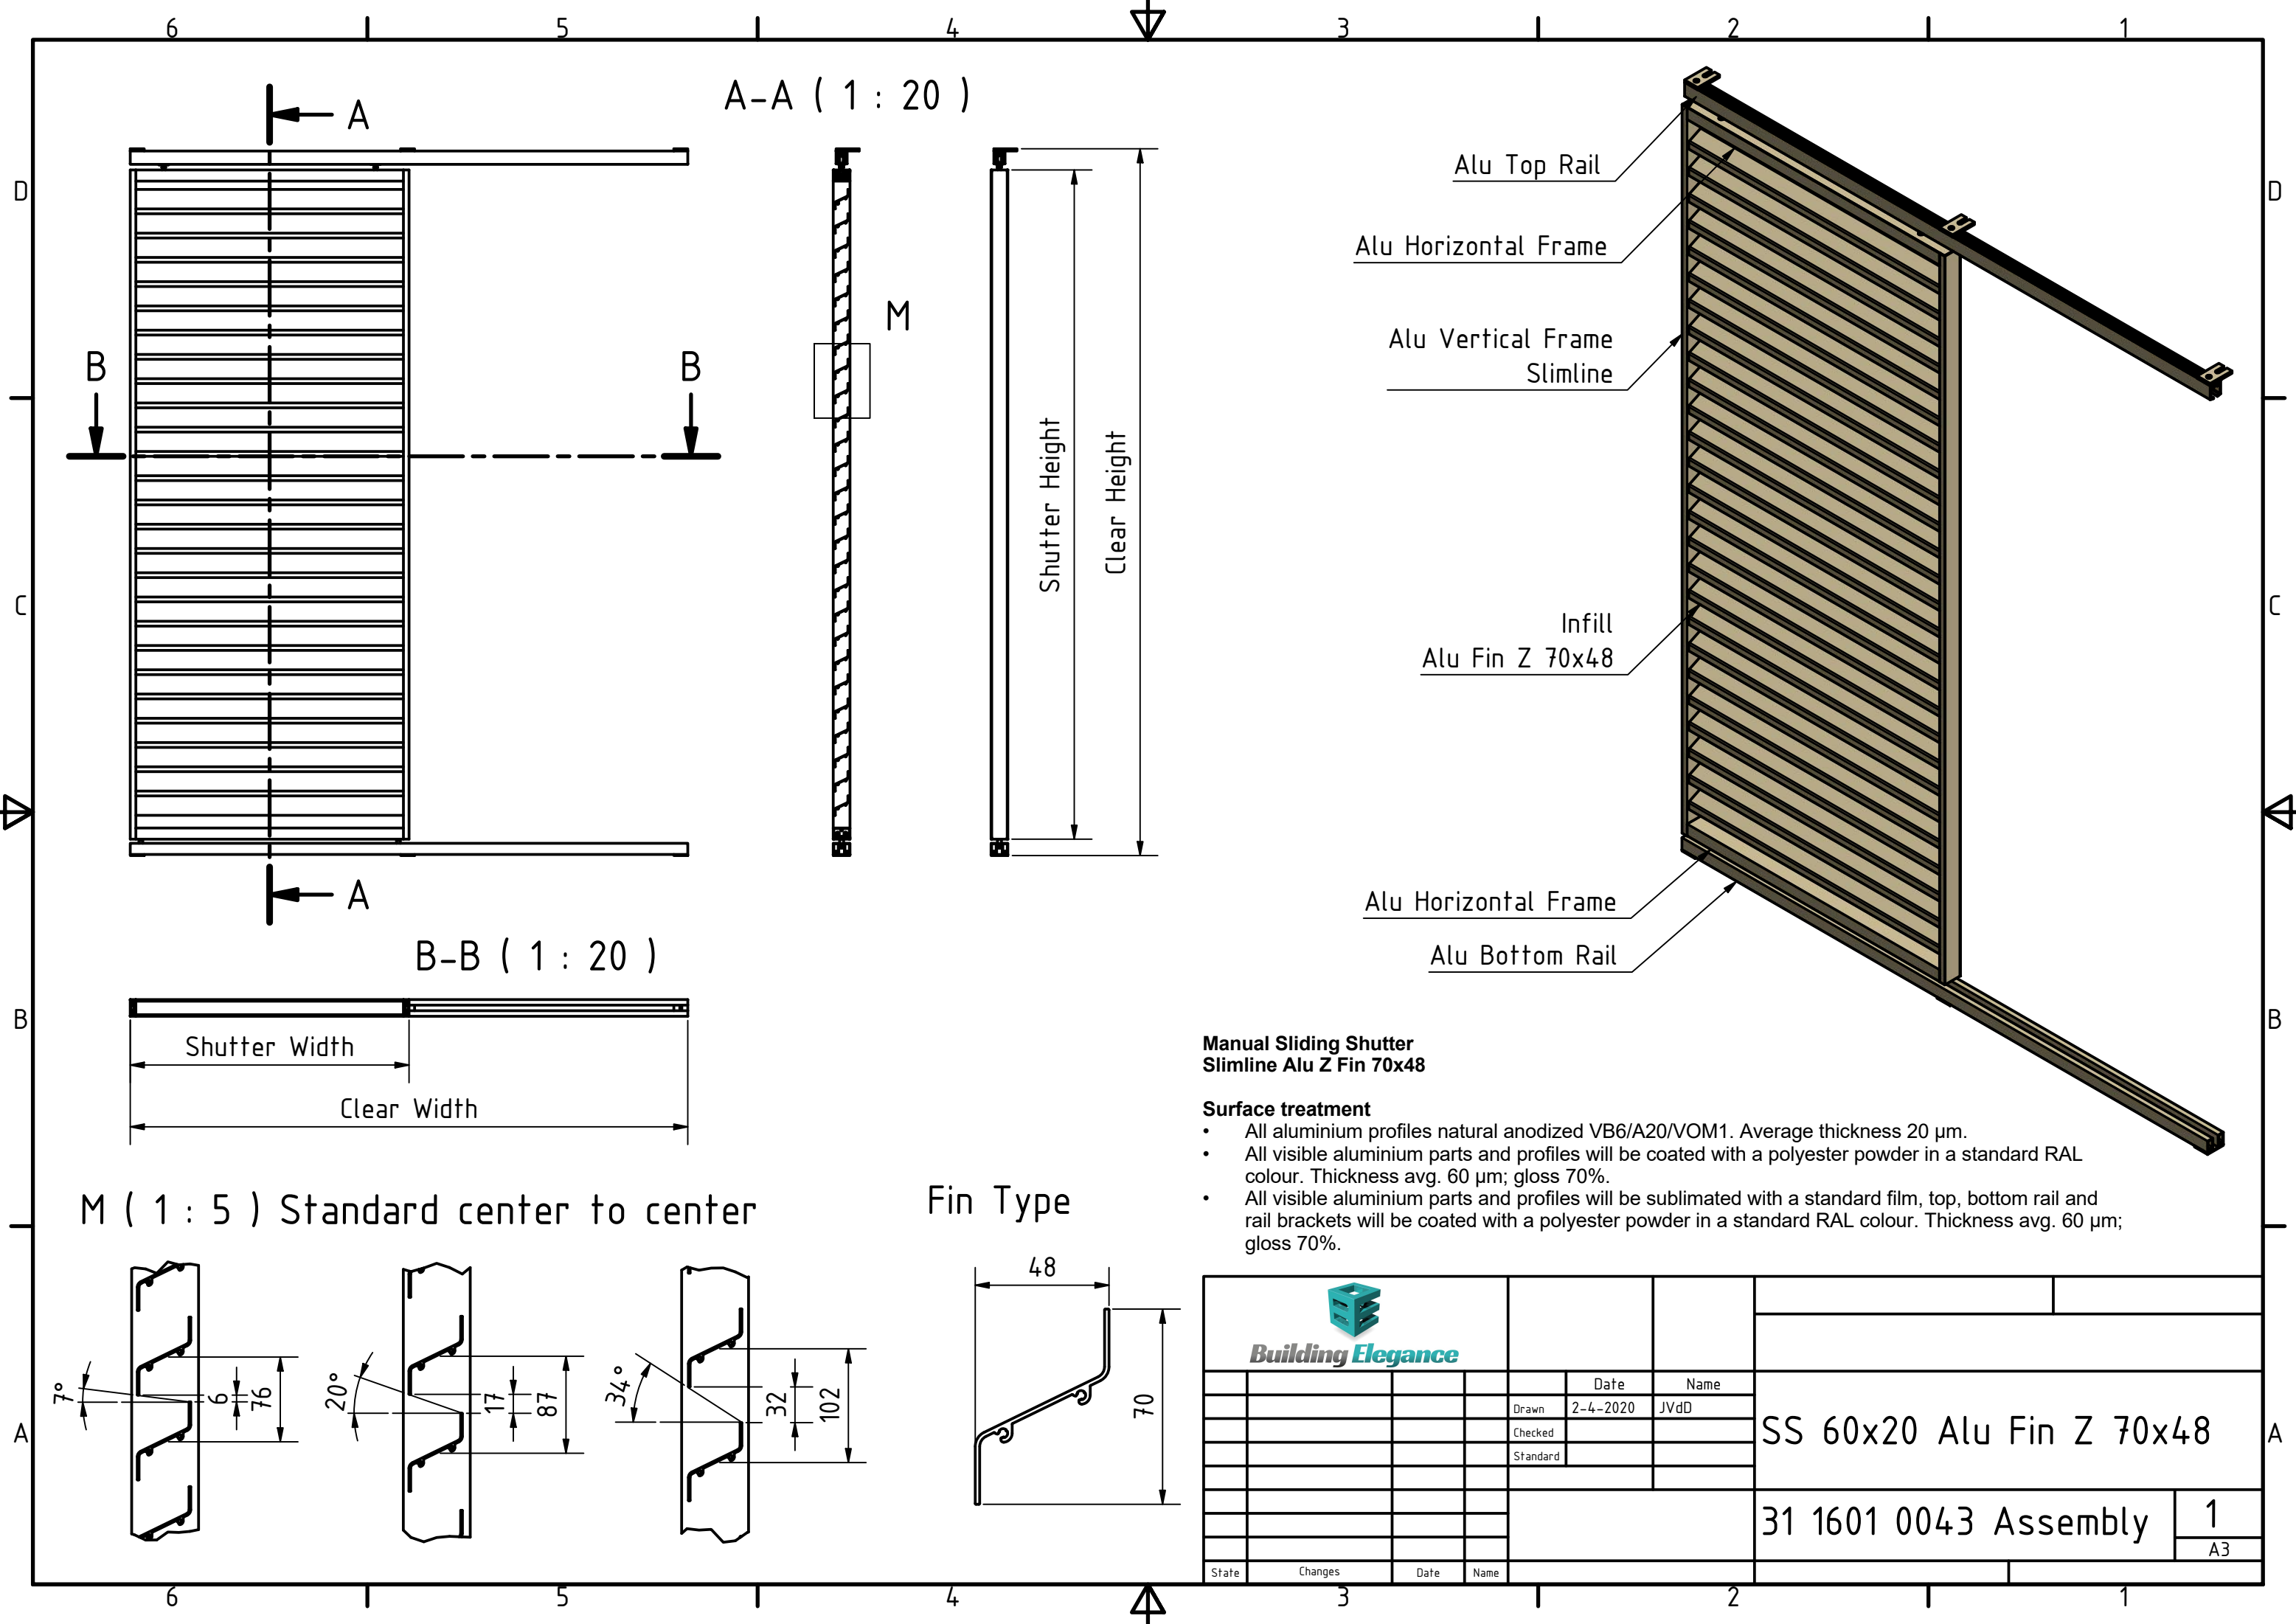

Manual Sliding Shutter
Slimline Alu Z Fin 70x48

- Surface treatment**
- All aluminium profiles natural anodized VB6/A20/VOM1. Average thickness 20 µm.
 - All visible aluminium parts and profiles will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.
 - All visible aluminium parts and profiles will be sublimated with a standard film, top, bottom rail and rail brackets will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.

 Building Elegance										
				Date	Name	SS 60x20 Alu Fin Z 70x48				
				Drawn	2-4-2020					JVdD
				Checked						
				Standard						
							31 1601 0043 Assembly		1	
							A3			
State	Changes	Date	Name							