


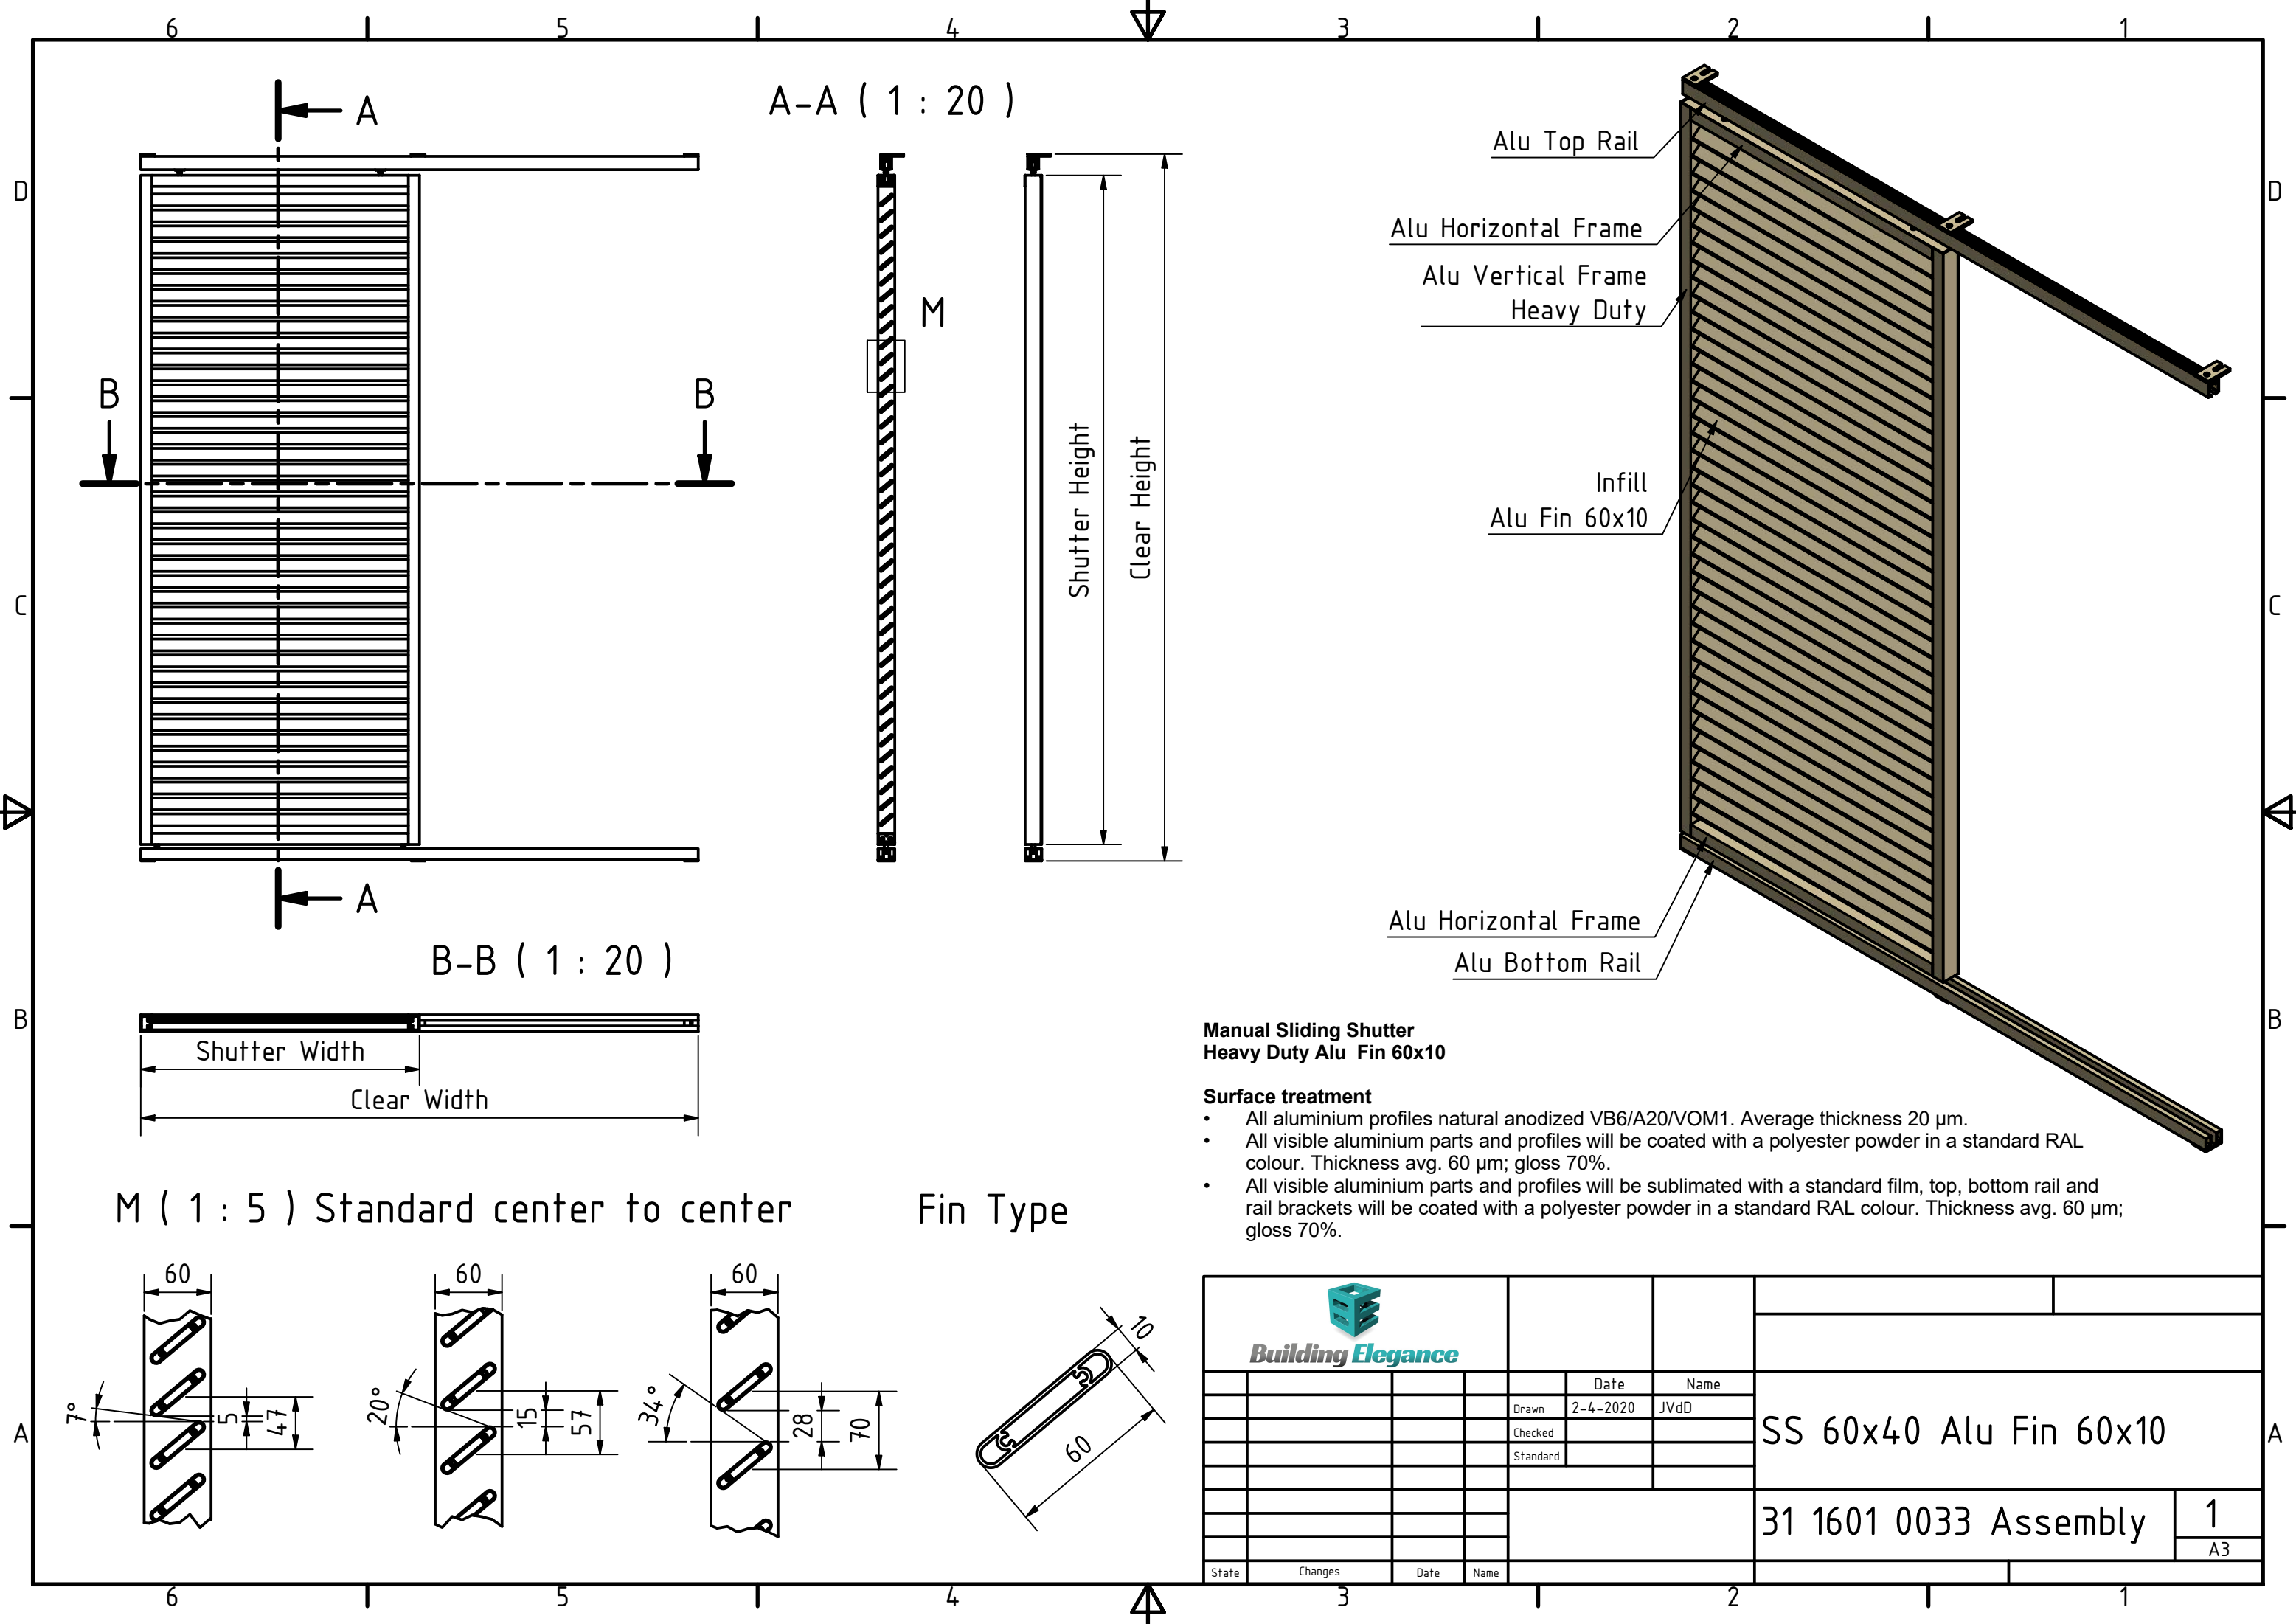

Manual Sliding Shutter
Heavy Duty Alu Fin 60x10

Surface treatment

- All aluminium profiles natural anodized VB6/A20/VOM1. Average thickness 20 µm.
- All visible aluminium parts and profiles will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.
- All visible aluminium parts and profiles will be sublimated with a standard film, top, bottom rail and rail brackets will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.

 Building Elegance									
				Date	Name	SS 60x40 Alu Fin 60x10			
			Drawn	2-4-2020	JVdD				
			Checked						
			Standard						
						31 1601 0033 Assembly			1
									A3
State	Changes	Date	Name						