


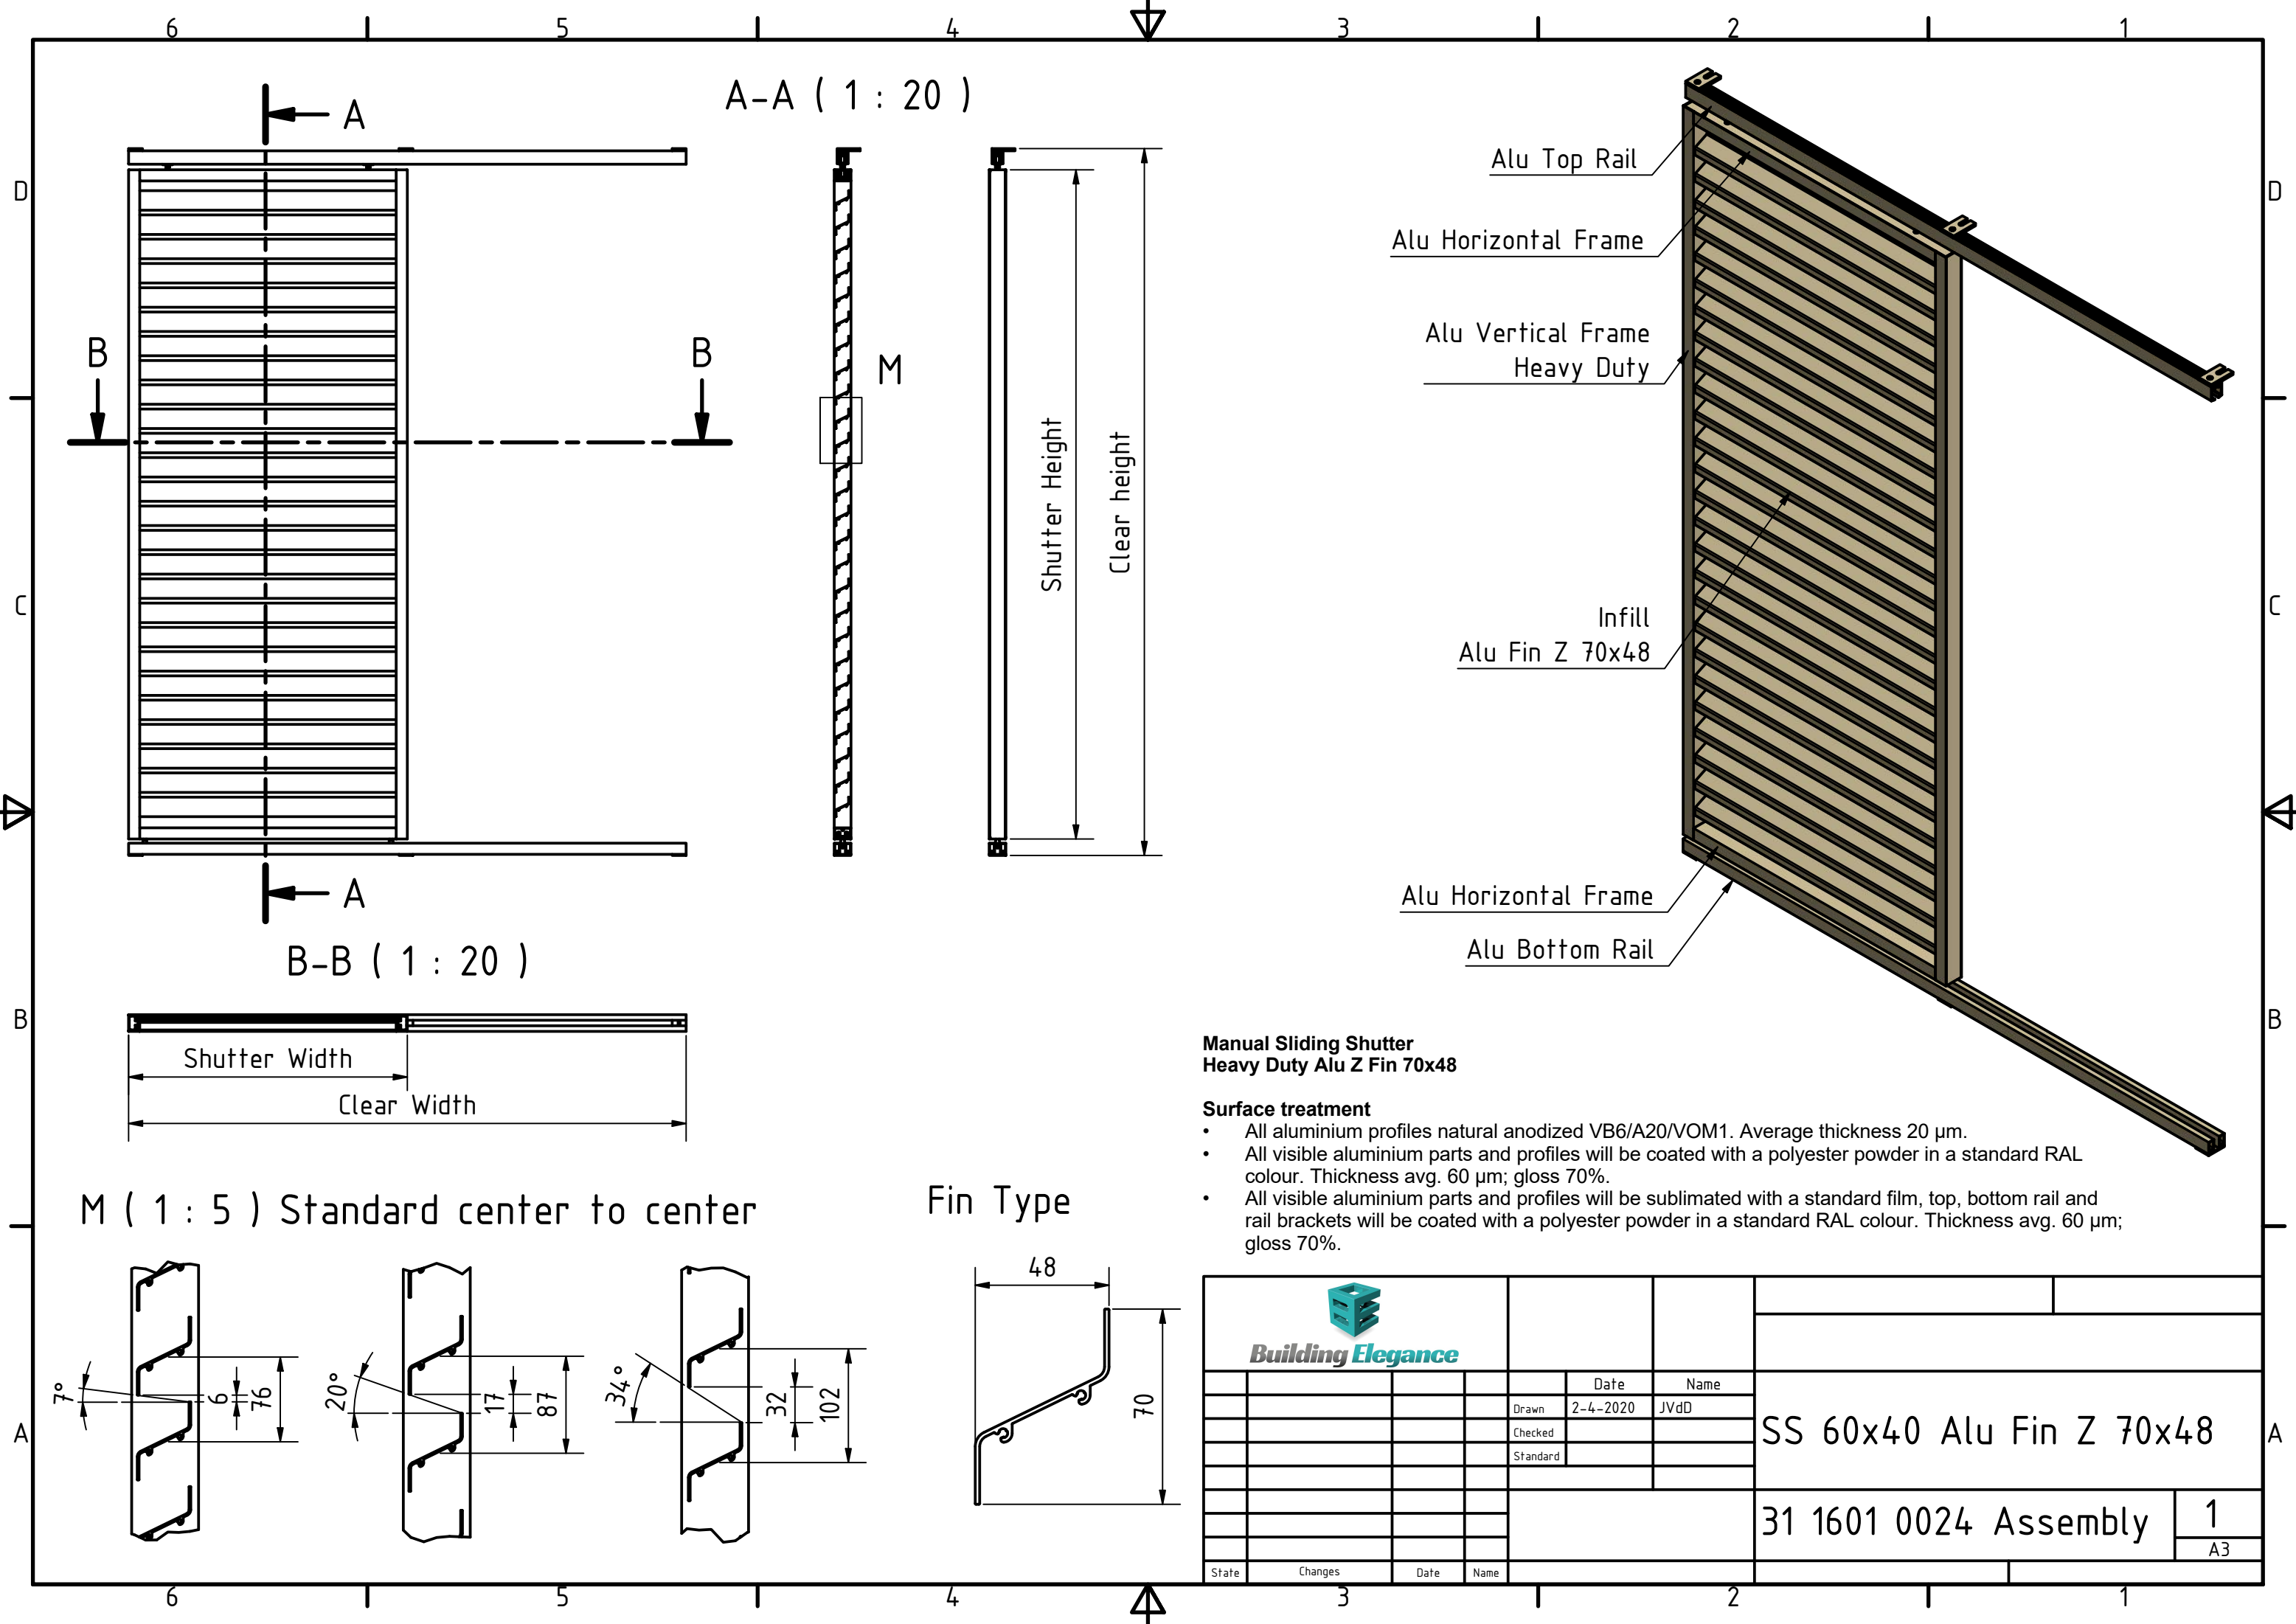

Manual Sliding Shutter
Heavy Duty Alu Z Fin 70x48

Surface treatment

- All aluminium profiles natural anodized VB6/A20/VOM1. Average thickness 20 µm.
- All visible aluminium parts and profiles will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.
- All visible aluminium parts and profiles will be sublimated with a standard film, top, bottom rail and rail brackets will be coated with a polyester powder in a standard RAL colour. Thickness avg. 60 µm; gloss 70%.

 Building Elegance		Date		Name		SS 60x40 Alu Fin Z 70x48	
		Drawn	2-4-2020	JVdD			
		Checked					
		Standard					
						31 1601 0024 Assembly	1
State	Changes	Date	Name			A3	